ILS or LOC RWY 21
POCATELLO RGNL (PIH)

LOC/DME I-PIH	APP CRS	Rwy Ldg	9059
110.3	211°	TDZE	4452
Chan 40		Apt Elev	4452

DME required.

Circling NA southeast of Rwy 3-21. For inop ALS, increase S-ILS-21 Cat E visibility to RVR 4000, S-LOC-21 Cat C/D/E to RVR 4500.
*RVR 1800 authorized with use of FD or AP or HUD to DA.

MALSR

MISSED APPROACH: Climb to 7000 direct PIH VOR/DME and on PIH R-235 to COLAY/PIH 15 DME and hold, do not exceed 230K in holding pattern.

ATIS	SALT LAKE CENTER	POCATELLO TOWER *	GND CON	UNICOM
135.625	128.35 239.25	119.1 (CTAF) L 257.8	121.9	122.95

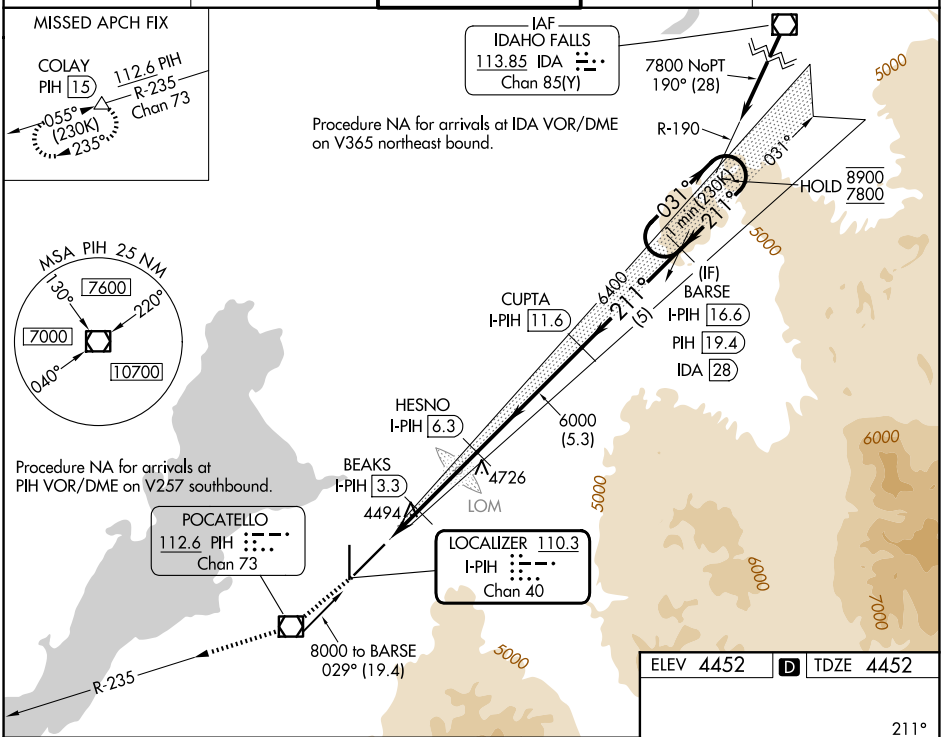

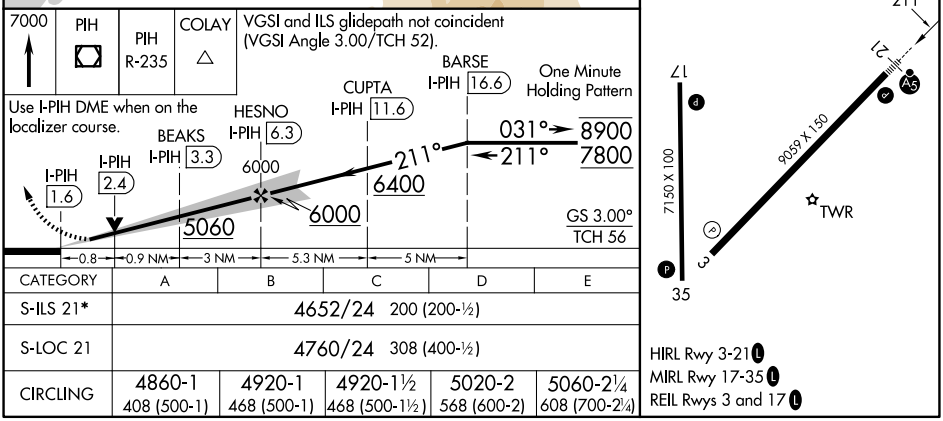

CATEGORY	A	B	C	D	E
S-ILS 21*	4652/24 200 (200-½)				
S-LOC 21	4760/24 308 (400-½)				
CIRCLING	4860-1 408 (500-1)	4920-1 468 (500-1)	4920-1½ 468 (500-1½)	5020-2 568 (600-2)	5060-2¼ 608 (700-2¼)

HIRL Rwy 3-21 L
MIRL Rwy 17-35 L
REIL Rwys 3 and 17 L

NW-1, 11 JUN 2026 to 09 JUL 2026

NW-1, 11 JUN 2026 to 09 JUL 2026