ILS or LOC RWY 35L

RENO/TAHOE INTL (RNO)

LOC/DME I-AGY	APP CRS	Rwy Ldg	10011
109.9	347°	TDZE	4410
Chan 36		Apt Elev	4415

DME required.

Circling Rwy 8 NA at night.
For inop ALS, increase S-ILS 35L Cats A, B, C visibility to 1⅞ SM.
-13°C

MALSR

MISSED APPROACH: Climb to 11000 on heading 350° and on FMG VORTAC R-332 to PYRAM INT/FMG 22.2 DME and hold, continue climb-in-hold to 11000.

D-ATIS	NORCAL APP CON	RENO TOWER	GND CON
135.8 363.0	119.2 279.55 126.3 353.9	118.7 257.8	121.9 348.6

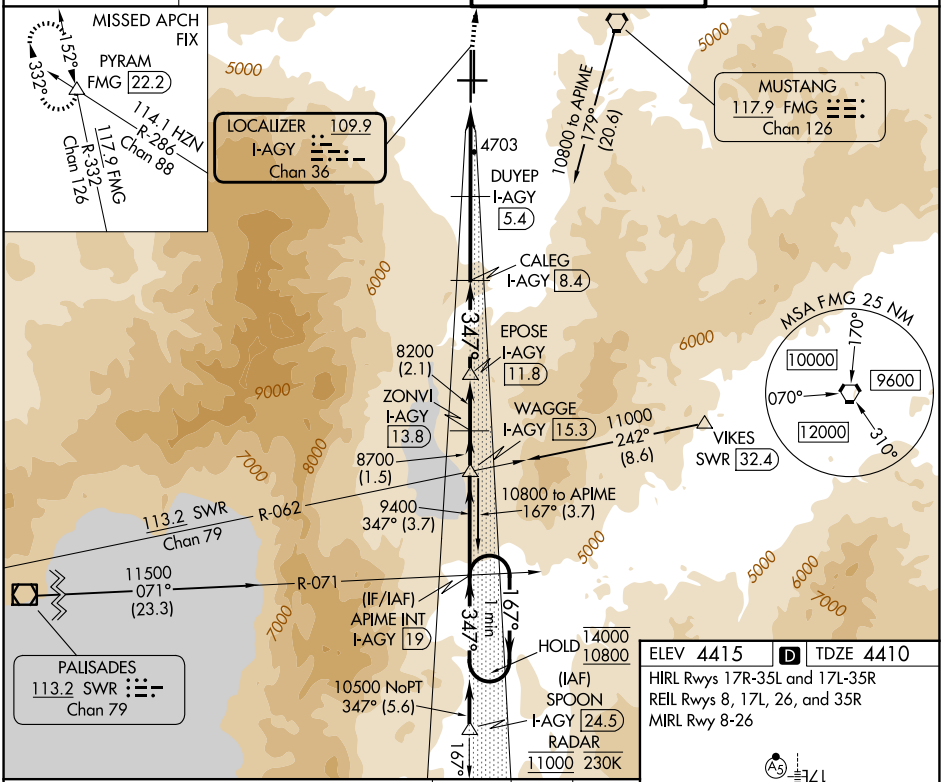

ELEV 4415 D TDZE 4410

HIRL Rwys 17R-35L and 17L-35R
REIL Rwys 8, 17L, 26, and 35R
MIRL Rwy 8-26

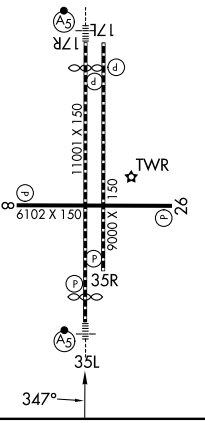

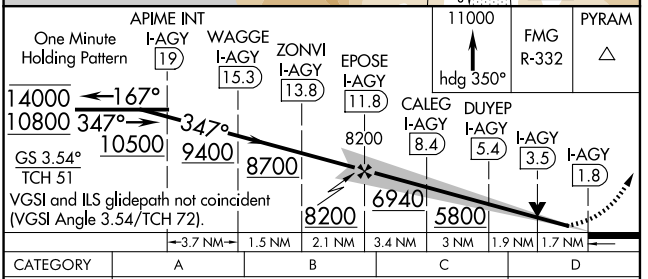

CATEGORY	A	B	C	D
S-ILS 35L	5062-1½ 652 (700-1½)			NA
S-LOC 35L	5120-1 710 (800-1)		5120-2 710 (800-2)	NA
CIRCLING	5340-1¼ 925 (1000-1¼)		6460-3 2045 (2100-3)	NA

SW-4, 11 JUN 2026 to 09 JUL 2026
SW-4, 11 JUN 2026 to 09 JUL 2026