


D-ATIS ARR 134.375
 DEP 135.3
 CINCINNATI TOWER
 118.3 (RWYS 18C/36C, 09/27)
 118.975 360.85 (RWY 18L/36R)
 133.325 (RWY 18R/36L)
 GND CON
 121.7
 CLNC DEL
 127.175
 CPDLC
 PDC


RWY 09-27
 PCR 922 R/B/W/T
 S-120, D-250, 2D-550, 2D/2D2-875
 RWY 18C-36C
 PCR 741 R/A/W/T
 S-120, D-250, 2D-550, 2D/2D2-875
 RWY 18L-36R
 PCR 790 R/A/W/T
 S-120, D-250, 2D-550, 2D/2D2-875
 RWY 18R-36L
 PCR 778 R/A/W/T
 S-120, D-250, 2D-550, 2D/2D2-875

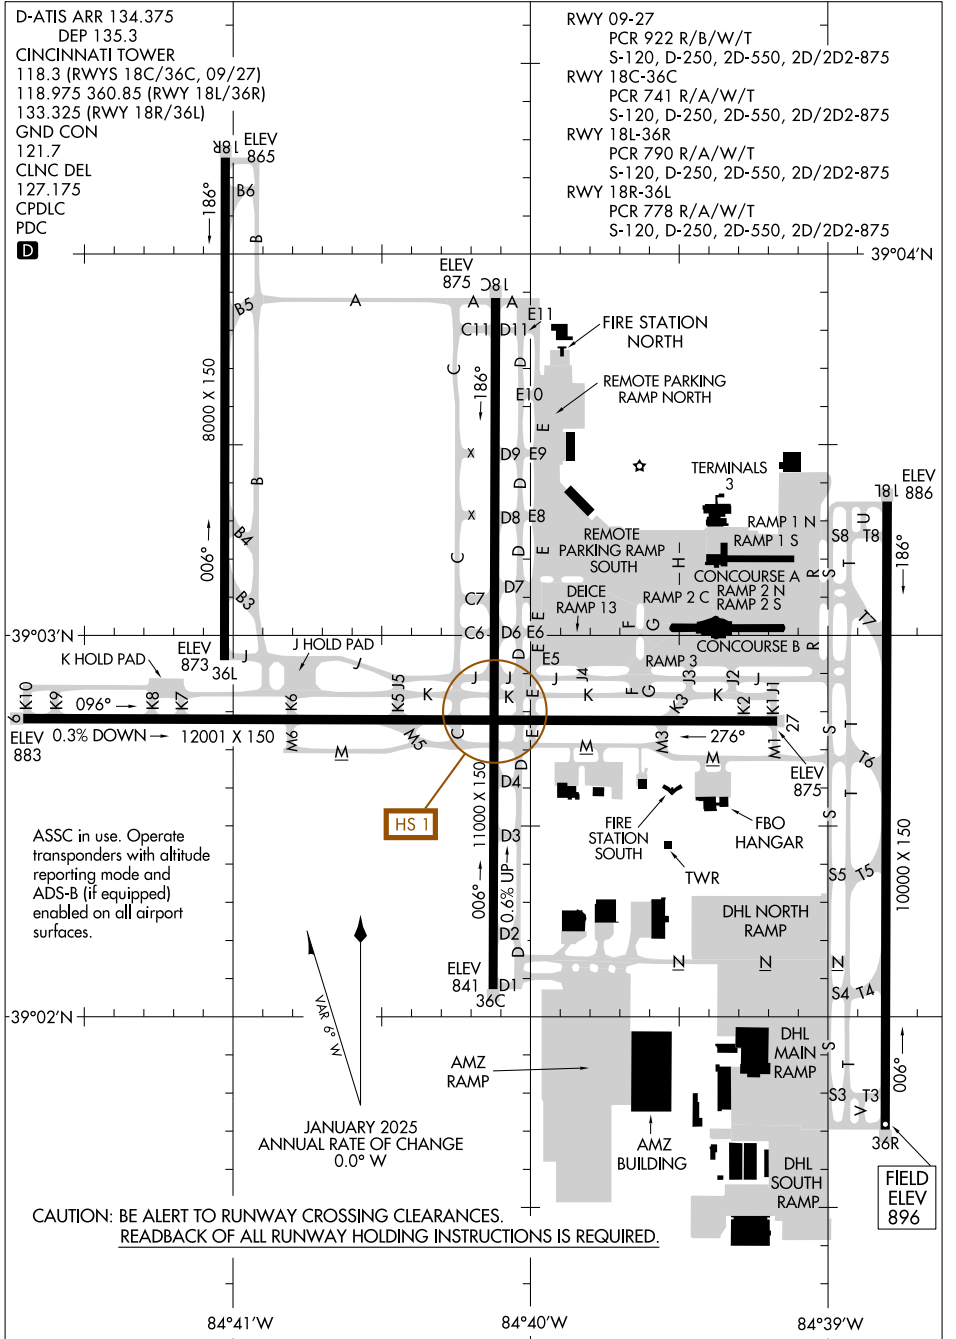

SE-1, 11 JUN 2026 to 09 JUL 2026

SE-1, 11 JUN 2026 to 09 JUL 2026

ASSC in use. Operate transponders with altitude reporting mode and ADS-B (if equipped) enabled on all airport surfaces.



JANUARY 2025 ANNUAL RATE OF CHANGE 0.0° W

CAUTION: BE ALERT TO RUNWAY CROSSING CLEARANCES.
 READBACK OF ALL RUNWAY HOLDING INSTRUCTIONS IS REQUIRED.