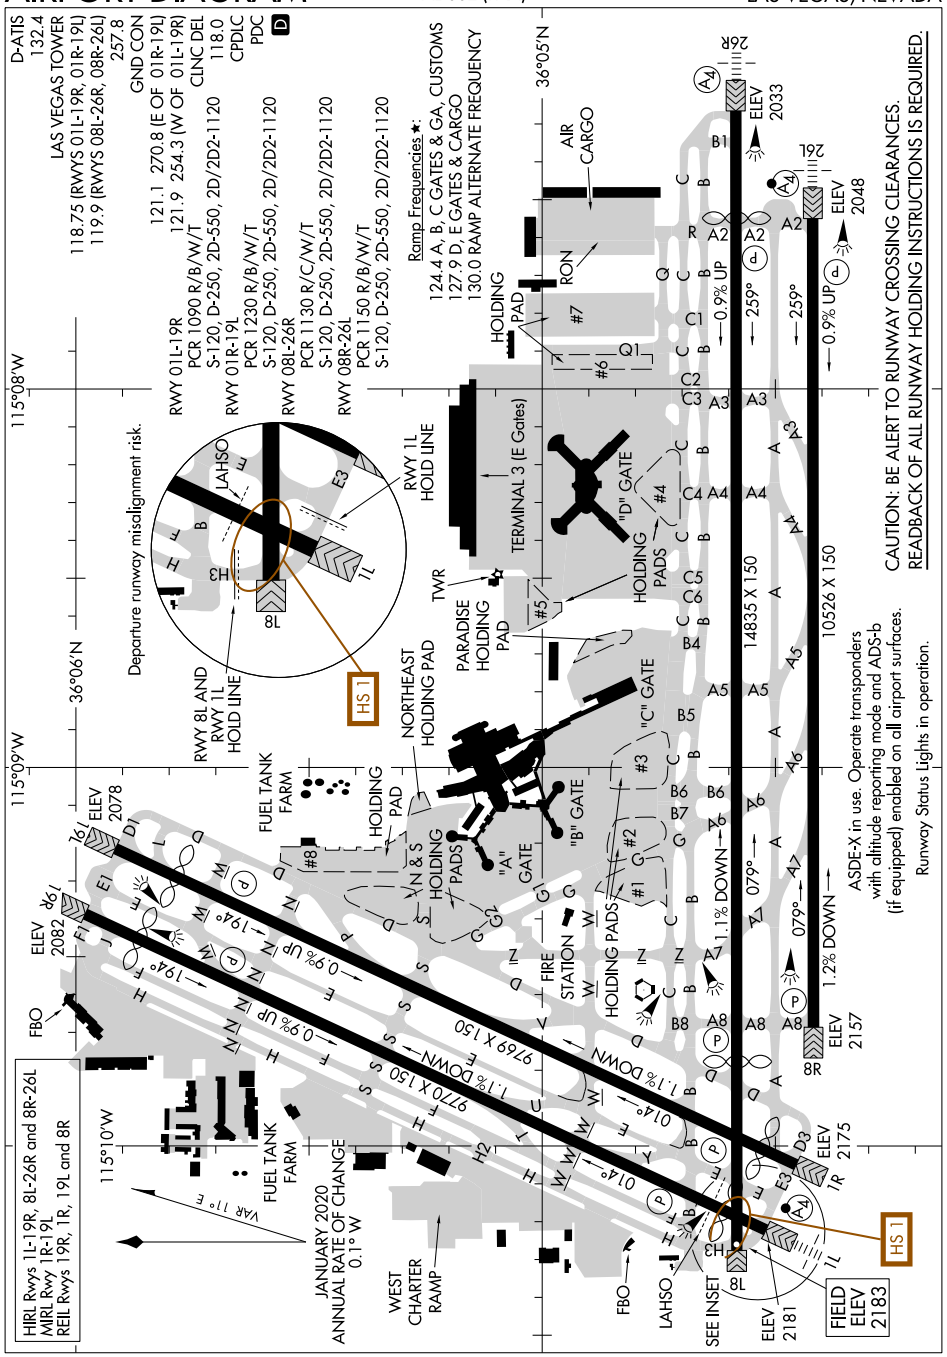
D-ATIS 132.4
LAS VEGAS TOWER
118.75 (RWYS 01L-19R, 01R-19L)
119.9 (RWYS 08L-26R, 08R-26L)
121.1 270.8 (E OF 01R-19L)
121.9 254.3 (W OF 01L-19R)
CLNC DEL 257.8
GND CON 118.0
CPDLC
PDC
D
RWY 01L-19R
PCR 1090 R/B/W/T
S-120, D-250, 2D-550, 2D/2D2-1120
RWY 01R-19L
PCR 1230 R/B/W/T
S-120, D-250, 2D-550, 2D/2D2-1120
RWY 08L-26R
PCR 1130 R/C/W/T
S-120, D-250, 2D-550, 2D/2D2-1120
RWY 08R-26L
PCR 1150 R/B/W/T
S-120, D-250, 2D-550, 2D/2D2-1120
Ramp Frequencies ★:
124.4 A, B, C GATES & GA, CUSTOMS
127.9 D, E GATES & CARGO
130.0 RAMP ALTERNATE FREQUENCY
115°08'W
36°05'N
36°06'N
115°09'W
115°10'W
Departure runway misalignment risk.
RWY 8L AND RWY 1L HOLD LINE
RWY 1L HOLD LINE
HS 1
TERMINAL 3 (E Gates)
"D" GATE
"C" GATE
"B" GATE
"A" GATE
HOLDING PADS
HOLDING PAD
PARADISE HOLDING PAD
NORTHEAST HOLDING PAD
N & S HOLDING PADS
TWR
AIR CARGO
RON
FUEL TANK FARM
FIRE STATION
FBO
LAHSO
SEE INSET
WEST CHARTER RAMP
JANUARY 2020 ANNUAL RATE OF CHANGE 0.1° W
VAR 11° E
14835 X 150
10526 X 150
9769 X 150
9770 X 150
1.1% DOWN
1.2% DOWN
0.9% UP
079°
014°
194°
259°
ELEV 2078
ELEV 2082
ELEV 2033
ELEV 2048
ELEV 2157
ELEV 2175
ELEV 2181
FIELD ELEV 2183
26R
26L
8R
8L
1R
1L
HIRL Rwys 1L-19R, 8L-26R and 8R-26L
MIRL Rwy 1R-19L
REIL Rwys 19R, 1R, 19L and 8R
CAUTION: BE ALERT TO RUNWAY CROSSING CLEARANCES.
READBACK OF ALL RUNWAY HOLDING INSTRUCTIONS IS REQUIRED.
ASDE-X in use. Operate transponders with altitude reporting mode and ADS-b (if equipped) enabled on all airport surfaces.
Runway Status Lights in operation.