

|   |                        |   |
|---|------------------------|---|
| LOC/DME I-RBD<br><b>110.75</b><br>Chan <b>44(Y)</b> | APP CRS<br><b>309°</b> | Rwy Ldg<br>TDZE <b>660</b><br>Apt Elev <b>661</b> |
|---|------------------------|---|


# ILS or LOC RWY 31

DALLAS EXEC (R.BD)

RADAR required for procedure entry,  
DME or RADAR required for LOC only.

MISSED APPROACH: Climb to 1200 then climbing  
right turn to 2500 on heading 090° and CVE  
VOR/DME R-125 to FLIPP/CVE 38.5 DME and hold.


|                       |  |  |                           |                         |
|-----------------------|--|--|---------------------------|-------------------------|
| ATIS<br><b>126.35</b> | LONE STAR APP CON<br><b>125.2 343.65</b> | EXECUTIVE TOWER★<br><b>127.25 (CTAF) 0</b> | GND CON<br><b>119.475</b> | UNICOM<br><b>122.95</b> |
|-----------------------|--|--|---------------------------|-------------------------|

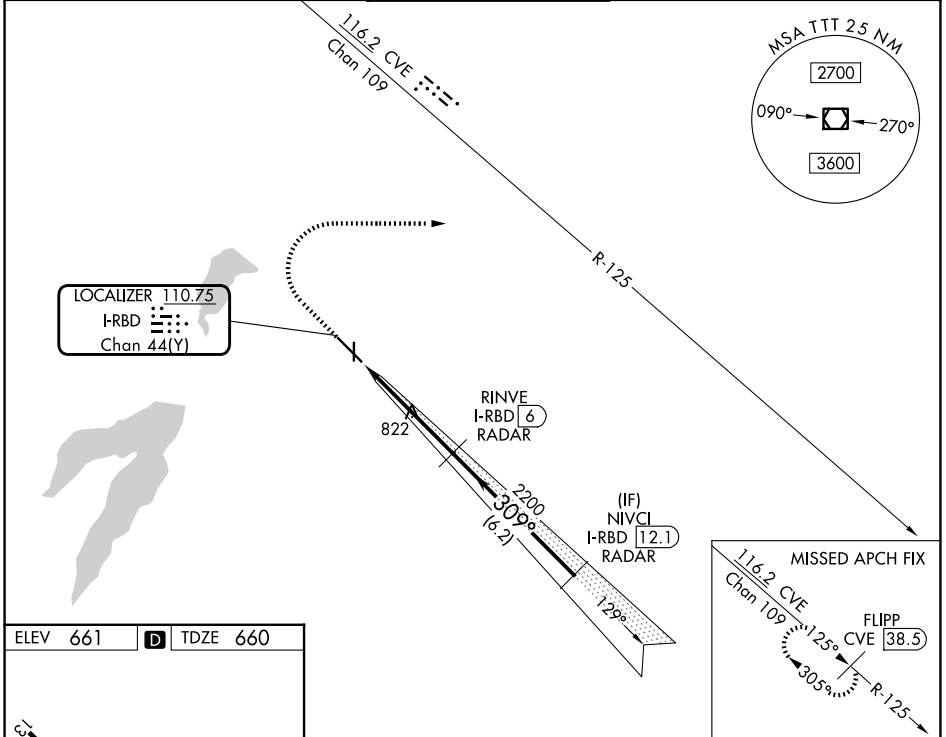

SC-2, 11 JUN 2026 to 09 JUL 2026

SC-2, 11 JUN 2026 to 09 JUL 2026

|          |          |          |
|----------|----------|----------|
| ELEV 661 | <b>D</b> | TDZE 660 |
|----------|----------|----------|



|            |            |            |                |                     |                        |
|------------|------------|------------|----------------|---------------------|------------------------|
| 1200       | 2500       | CVE R-125  | FLIPP CVE 38.5 | RINVE I-RBD 6 RADAR | NIVCL I-RBD 12.1 RADAR |
| ↑          | hdg 090°   |            |                |                     |                        |
| *LOC only. |            |            |                |                     |                        |
|            | *I-RBD 1.2 | *I-RBD 2.4 | 2200           | 309°                | 3000                   |
|            | 1.2 NM     | 3.5 NM     | 6.2 NM         |                     | GS 3.00° TCH 45        |

|  |   |
|--|---|
| REIL Rwys 13, 17, 31 and 35<br>MIRL Rwys 13-31 and 17-35 | FAF to MAP 4.7 NM   |
| Knots  | 60 90 120 150 180   |
| Min:Sec  | 4:42 3:08 2:21 1:53 1:34  |
| CATEGORY   | A B C D   |
| S-ILS 31   | 860-3/4 200 (200-3/4)   |
| S-LOC 31   | 1080-1 420 (500-1) 1080-1 1/8 420 (500-1 1/8)                                       |
| CIRCLING   | 1160-1 499 (500-1) 1220-1 559 (600-1) 1340-2 679 (700-2) 1400-2 1/4 739 (800-2 1/4) |