ILS or LOC/DME RWY 27

ATHENS/BEN EPPS (AHN)

LOC I-AHN	APP CRS	Rwy Ldg	6122
110.95	274°	TDZE	813
		Apt Elev	813

Night landing: Rwy 2, 20 NA. DME from AHN VOR/DME. Simultaneous reception of I-AHN and AHN DME Required. VDP NA with Winder altimeter setting. When local altimeter setting not received, use Winder altimeter setting: increase DA to 1071 feet; increase all MDA 60 feet and S-LOC 27 visibility Cats C and D to 1 SM and Circling Cat D visibility to 2¼ SM. For inop MALSF, increase S-LOC 27 all Cats visibility to 1 mile. For inop MALSF when using Winder altimeter setting, increase S-ILS 27 all Cats visibility to ⅞ mile and increase S-LOC 27 Cats A and B visibility to 1 mile, and Cats C and D to 1⅛ mile. Inop table does not apply to S-ILS 27.

MALSF

MISSED APPROACH: Climb to 1500 then climbing left turn to 2500 on heading 060° and AHN VOR/DME R-092 to VESTO INT/ AHN 23.6 DME and hold.

ASOS	ATLANTA APP CON ★	ATHENS TOWER ★	GND CON	UNICOM
132.875	132.475 291.1	126.3 (CTAF) L 338.275	121.8	122.95

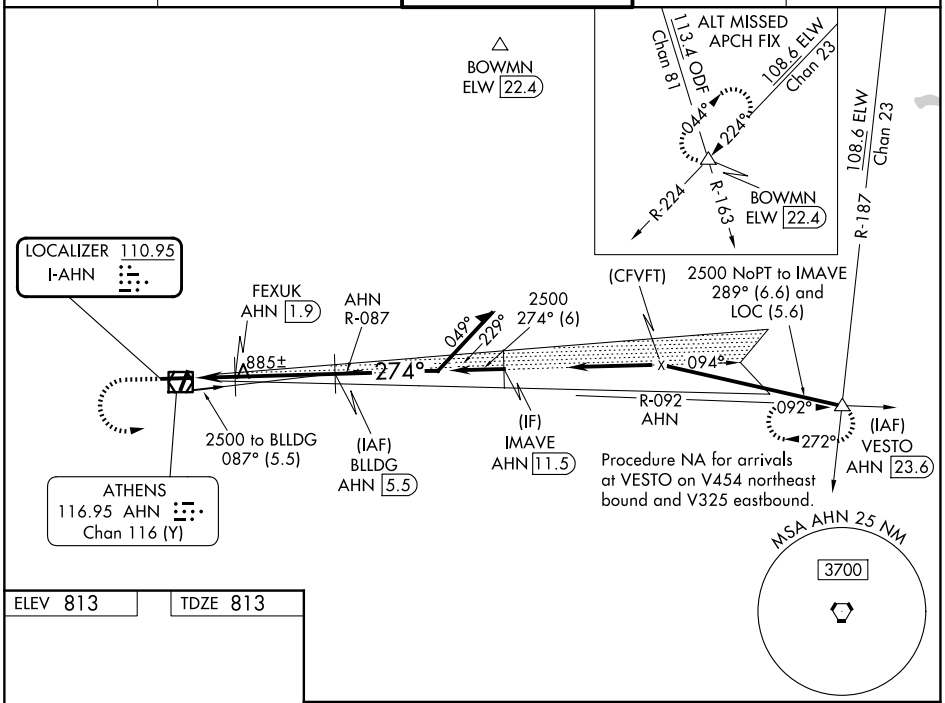



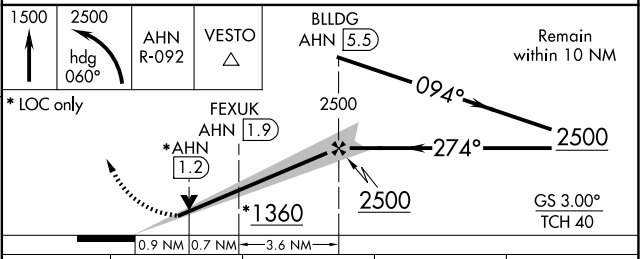

MIRL Rwy 2-20
HIRL Rwys 9-27 L

FAF to MAP 5.2 NM

Knots	60	90	120	150	180
Min:Sec	5:12	3:28	2:36	2:05	1:44

CATEGORY	A	B	C	D
S-ILS 27	1013-¾ 200 (200-¾)			
S-LOC 27	1160-¾ 347 (400-¾)			
CIRCLING	1260-1 447 (500-1)	1280-1 467 (500-1)	1320-1½ 507 (600-1½)	1460-2 647 (700-2)

SE-4, 11 JUN 2026 to 09 JUL 2026
SE-4, 11 JUN 2026 to 09 JUL 2026