

WAAS CH 66023 W04A	APP CRS 040°	Rwy Ldg TDZE Apt Elev	4501 1944 1961
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 4


HASTINGS MUNI (HSI)

RNP APCH - GPS.


⚠ Baro-VNAV and VDP NA when using GRI altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -24°C or above 54°C. When local altimeter setting not received, use GRI altimeter setting and increase LPV DA to 2262 feet and all visibilities 1/8 SM. Increase LNAV/VNAV DA to 2414 feet and all visibilities 1/4 SM. Increase all MDAs 80 feet and LNAV visibility Cat C 1/8 SM, and Circling visibility Cat C 1/4 SM.

MISSED APPROACH: Climb to 4000 direct DECNE and on track 082° to ROMAD and hold.

ASOS 120.525	MINNEAPOLIS CENTER 119.4 278.8	UNICOM 122.8 (CTAF) 1
------------------------	--	---------------------------------

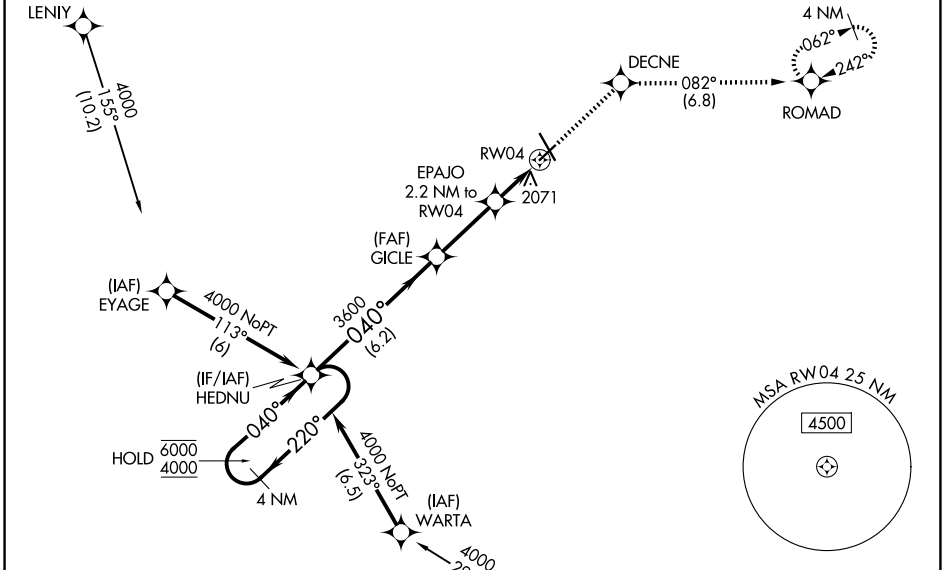

ELEV 1961	D TDZE 1944			
4000	DECNE	Tr 082°	ROMAD	
6000 ← 220°	4000 → 040°	3600	EPAJO 2.2 NM to RW04	
GP 3.00°	TCH 40	3600	1.3 NM to RW04	
4 NM Holding Pattern		2680		
6.2 NM		2.9 NM		
1 NM		1.3 NM		
CATEGORY	A	B	C	D
LPV DA	2194-1 250 (300-1)		NA	
LNAV/VNAV DA	2346-1 1/8 402 (400-1 1/8)		NA	
LNAV MDA	2380-1	436 (500-1)	2380-1 1/4 436 (500-1 1/2)	NA
CIRCLING	2380-1 419 (500-1)	2540-1 579 (600-1)	2540-1 1/2 579 (600-1 1/2)	NA

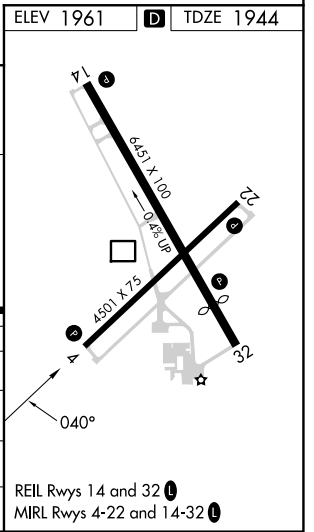

NC-2, 11 JUN 2026 to 09 JUL 2026

NC-2, 11 JUN 2026 to 09 JUL 2026