


|                                 |                        |                             |   |
|---------------------------------|------------------------|-----------------------------|---|
| WAAS<br>CH <b>87030</b><br>W13A | APP CRS<br><b>135°</b> | Rwy Ldg<br>TDZE<br>Apt Elev | <b>5000</b><br><b>1203</b><br><b>1204</b> |
|---------------------------------|------------------------|-----------------------------|---|

# RNAV (GPS) RWY 13



ARTHUR N NEU (CIN)

|                 |  |  |
|-----------------|--|--|
| RNP APCH - GPS. | <p><b>⚠</b> For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 54°C. Baro-VNAV and VDP NA when using Audubon altimeter setting. When local altimeter setting not received, use Audubon altimeter setting: increase LPV DA to 1515 feet; increase LNAV/VNAV DA to 1669 feet and all visibilities ¼ SM; increase all MDAs 80 feet and visibility Cat C ¼ SM.</p> | <p>MISSED APPROACH: Climb to 3000 direct COHGI and hold.</p> |
|                 |  |  |

|                          |  |                                 |
|--------------------------|--|---------------------------------|
| AWOS-3<br><b>118.025</b> | MINNEAPOLIS CENTER<br><b>134.0 288.3</b> | UNICOM<br><b>122.8 (CTAF) 0</b> |
|--------------------------|--|---------------------------------|

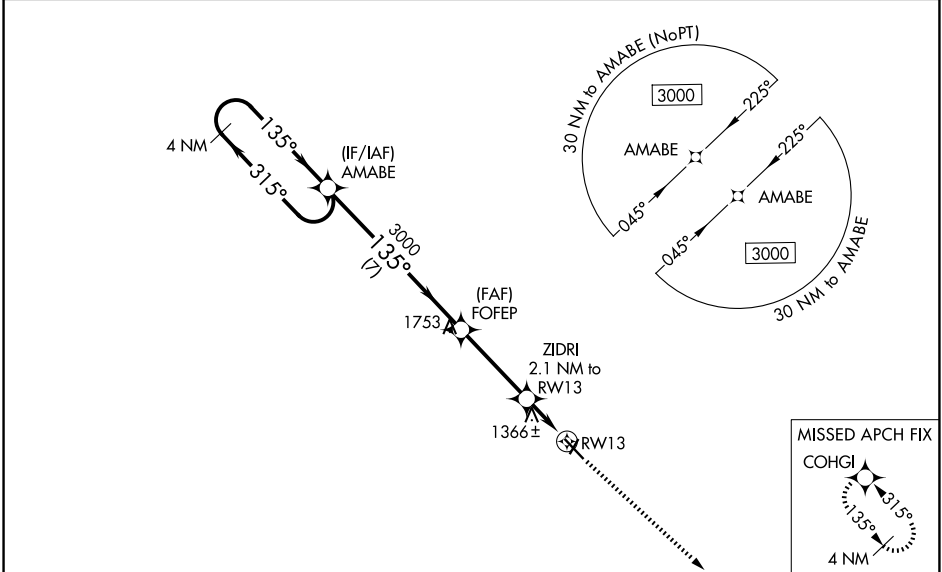

|           |           |
|-----------|-----------|
| ELEV 1204 | TDZE 1203 |
|-----------|-----------|

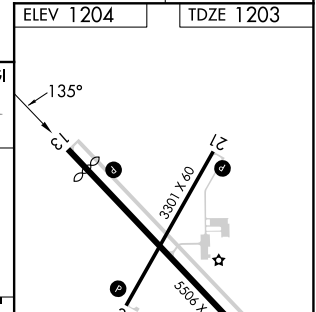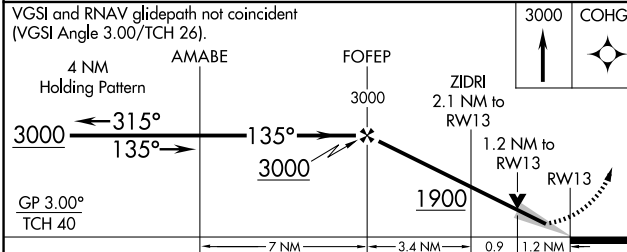

| CATEGORY     | A       | B            | C                       | D  |
|--------------|---------|--------------|-------------------------|----|
| LPV DA       | 1453-1  | 250 (300-1)  |                         | NA |
| LNAV/VNAV DA | 1607-1⅓ | 404 (500-1⅓) |                         | NA |
| LNAV MDA     | 1620-1  | 417 (500-1)  | 1620-1⅓<br>417 (500-1⅓) | NA |
| CIRCLING     | 1740-1  | 536 (600-1)  | 1980-2¼<br>776 (800-2¼) | NA |

MIRL Rwy 13-31 and 3-21  
REIL Rwy 3, 13, 21 and 31

NC-3, 11 JUN 2026 to 09 JUL 2026

NC-3, 11 JUN 2026 to 09 JUL 2026