

WAAS CH <b>49135</b> <b>W04A</b>	APP CRS <b>040°</b>	Rwy Ldg <b>5002</b> TDZE <b>181</b> Apt Elev <b>182</b>
--	------------------------	---


# RNAV (GPS) RWY 4

DEXTER B FLORENCE MEML FLD (ADF)


**▽** DME/DME RNP-0.3 NA. When local altimeter setting not received use Hot Springs altimeter setting and increase all DA 103 feet and MDA 120 feet and increase LPV all Cats visibility 1/8 mile and LNAV/VNAV all Cats visibility and Circling Cat C visibility 1/2 mile.  
**▲ NA** For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -1.5°C (5°F) or above 54°C (130°F). Baro-VNAV NA when using Hot Springs altimeter setting. Helicopter visibility reduction below 3/4 SM NA. Night landing: Rwy 22 NA.

MISSED APPROACH:  
Climb to 2100 direct COVNO and hold.

AWOS-3PT <b>118.175</b>	MEMPHIS CENTER <b>128.475 377.15</b>	UNICOM <b>122.7 (CTAF)</b>
----------------------------	---	-------------------------------

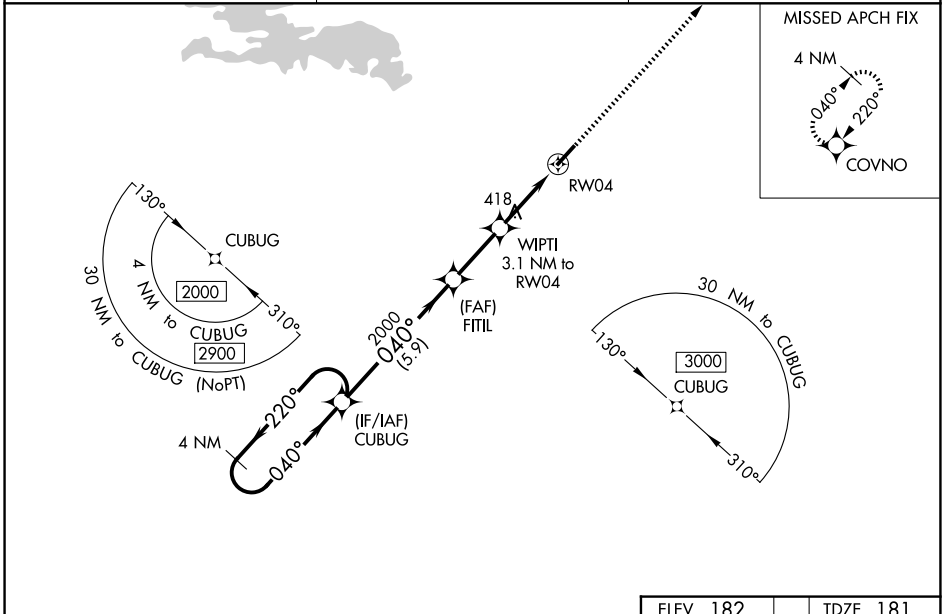

4 NM Holding Pattern		VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 23).		2100	COVNO
CUBUG		FITIL	WIPTI	*LNAV only.	
2000 ← 220°		2000	3.1 NM to RWY04		
040° →		2000			
GP 3.00°		*1200			
TCH 45					
		5.9 NM	2.5 NM	3.1 NM	
CATEGORY	A	B	C	D	
LPV DA	431-1 250 (300-1)			NA	
LNAV/VNAV DA	669-1 5/8 488 (500-1 3/8)			NA	
LNAV MDA	680-1	499 (500-1)	680-1 3/8 499 (500-1 3/8)	NA	
CIRCLING	760-1 578 (600-1)	800-1 618 (700-1)	1040-2 1/2 858 (900-2 1/2)	NA	

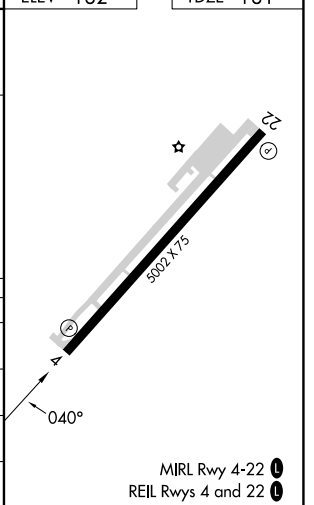

SC-1, 11 JUN 2026 to 09 JUL 2026

SC-1, 11 JUN 2026 to 09 JUL 2026