

WAAS CH <b>78038</b> <b>W04A</b>	APP CRS <b>046°</b>	Rwy Ldg TDZE Apt Elev	<b>4003</b> <b>420</b> <b>421</b>
--	------------------------	-----------------------------	---

# RNAV (GPS) RWY 4

HUMBOLDT MUNI (M53)

RNP APCH - GPS.



**▼** Rwy 4 helicopter visibility reduction below 1 SM NA. Procedure NA at night. Use MKL altimeter setting; when not received, use DYR altimeter setting and increase all MDAs 60 feet; increase LP Cats C/D visibility 1/8 SM and increase LNAV Cats C/D and Circling Cats C/D visibility 1/4 SM.

**MISSED APPROACH:**  
Climb to 3000 direct FASKA and hold.

MKL ASOS  
**119.325**

MEMPHIS CENTER  
**134.65 316.15**

UNICOM  
**122.8 (CTAF)**

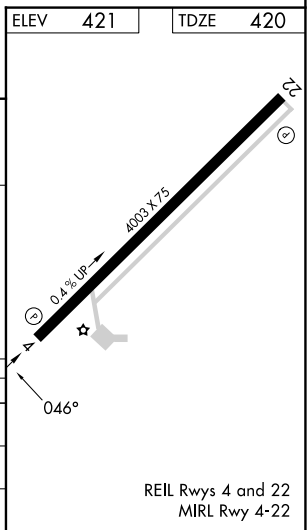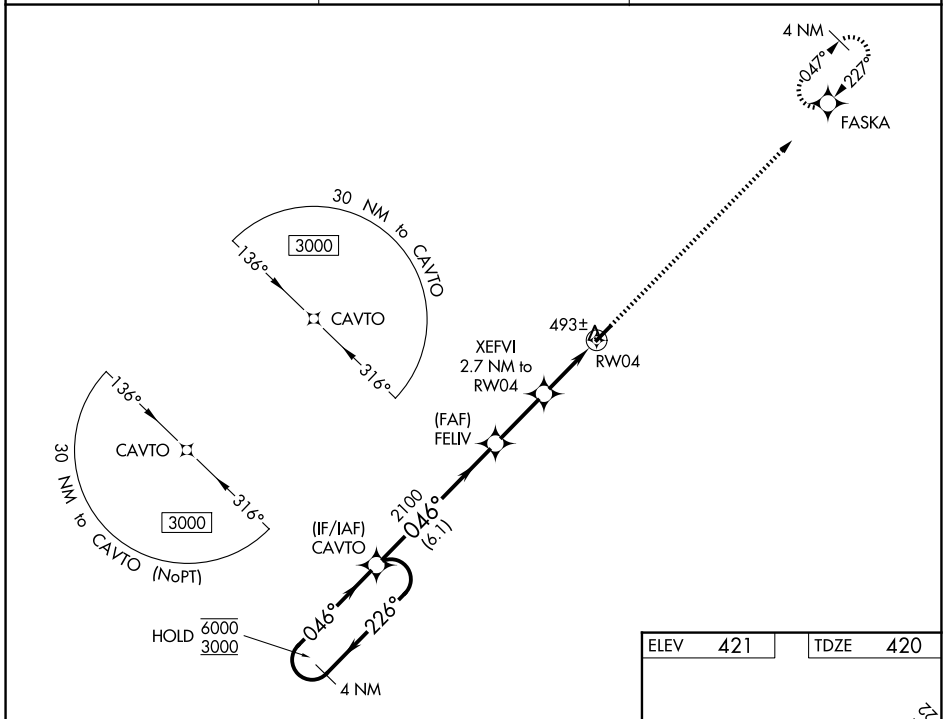

4 NM Holding Pattern		Visual Segment - Obstacles.		3000	FASKA
CAVTO		FELIV		XEFVI 2.7 NM to RW04	
6000 ← 226°	← 046° →	2100	1300	RW04	
3000		6.1 NM	2.5 NM	2.7 NM	
CATEGORY	A	B	C	D	
LP MDA	780-1 360 (400-1)				
LNAV MDA	820-1	400 (400-1)	820-1 1/8	400 (400-1 1/8)	
CIRCLING	900-1 479 (500-1)	920-1 499 (500-1)	1120-2 699 (700-2)	1120-2 1/4 699 (700-2 1/4)	