




LOC I-DTO 109.1	APP CRS 177°	Rwy Ldg 18L 18R TDZE 6502 5003 642 643 Apt Elev 643 643
---------------------------	------------------------	---

ILS or LOC RWY 18L

DENTON ENTERPRISE (D'TO)

ADF required. RADAR required for procedure entry.		MALSR AG	MISSED APPROACH: Climb to 2500 then right turn direct PINCK LOM and hold.
<p>▼ For inop ALS, increase S-ILS 18L all Cts visibility to 7/8 SM. For inop ALS, increase S-LOC 18L Cat C/D to 1 1/8 SM.</p> <p>▲ NA</p>			

ATIS 119.325	LONE STAR APP CON 118.1 306.95	DENTON TOWER ★ 119.95 (CTAF) 0	GND CON 123.95
------------------------	--	--	--------------------------

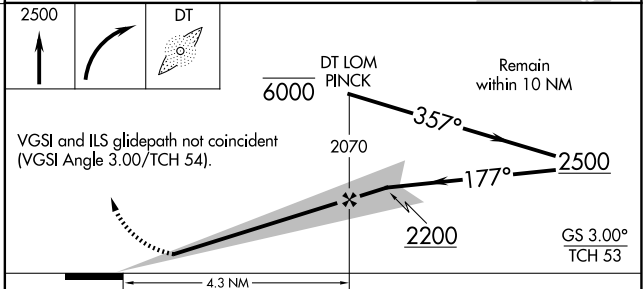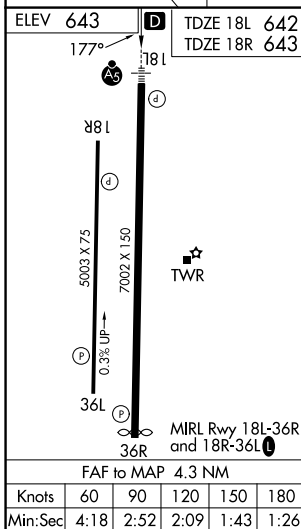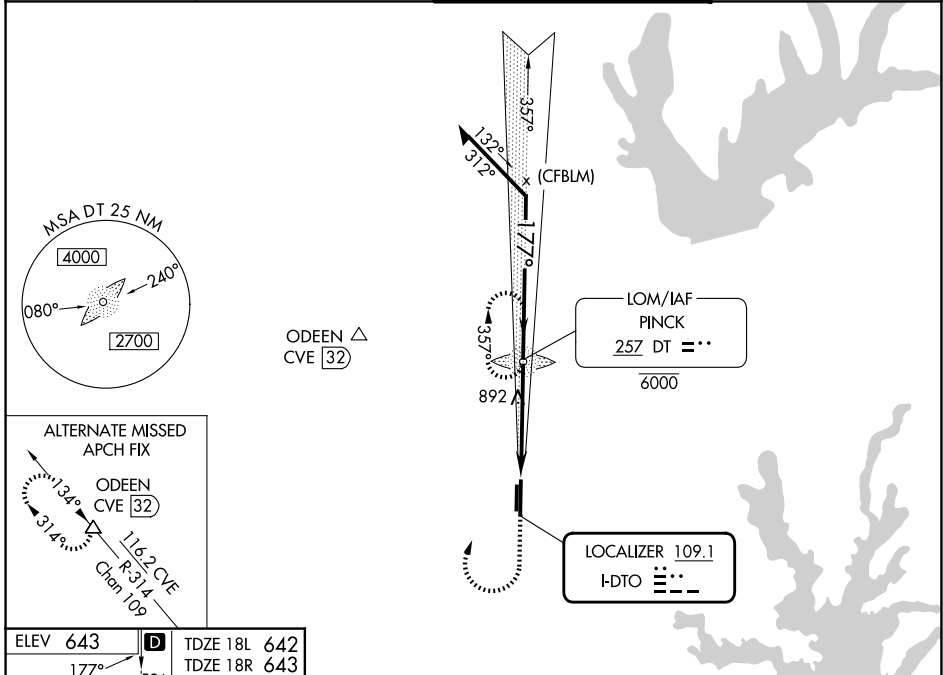

CATEGORY	A	B	C	D
S-ILS 18L	842-1/2		200 (200-1/2)	
S-LOC 18L	1160-1/2	518 (600-1/2)	1160-1	518 (600-1)
SIDESTEP 18R	1260-1	617 (700-1)	1260-1 3/4 617 (700-1 3/4)	1260-2 617 (700-2)
CIRCLING	1260-1	617 (700-1)	1380-2 737 (800-2)	1380-2 1/4 737 (800-2 1/4)