



LOC I-UUR 111.1	APP CRS 176°	Rwy Ldg TDZE Apt Elev	6500 414 425
---------------------------	------------------------	-----------------------------	---

ILS or LOC RWY 18

ROSCOE TURNER (CRX)

ADF required. RNAV 1-GPS.		MALSR 	MISSED APPROACH: Climb to 1000 then climbing right turn to 2400 direct UU LOM and hold, continue climb-in-hold to 2400.
Autopilot coupled approach NA below 1040. For inop ALS, increase S-LOC 18 Cats C and D visibility to 1¼ SM.			

AWOS-3PT 118.675	MEMPHIS CENTER 135.9 273.55	UNICOM 122.8 (CTAF) 1
----------------------------	---------------------------------------	---------------------------------

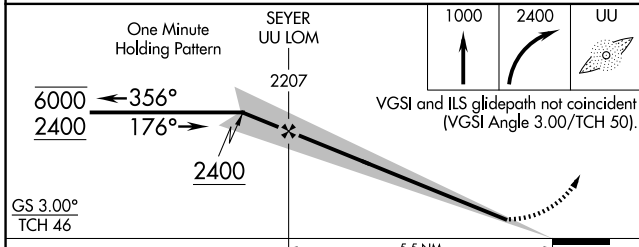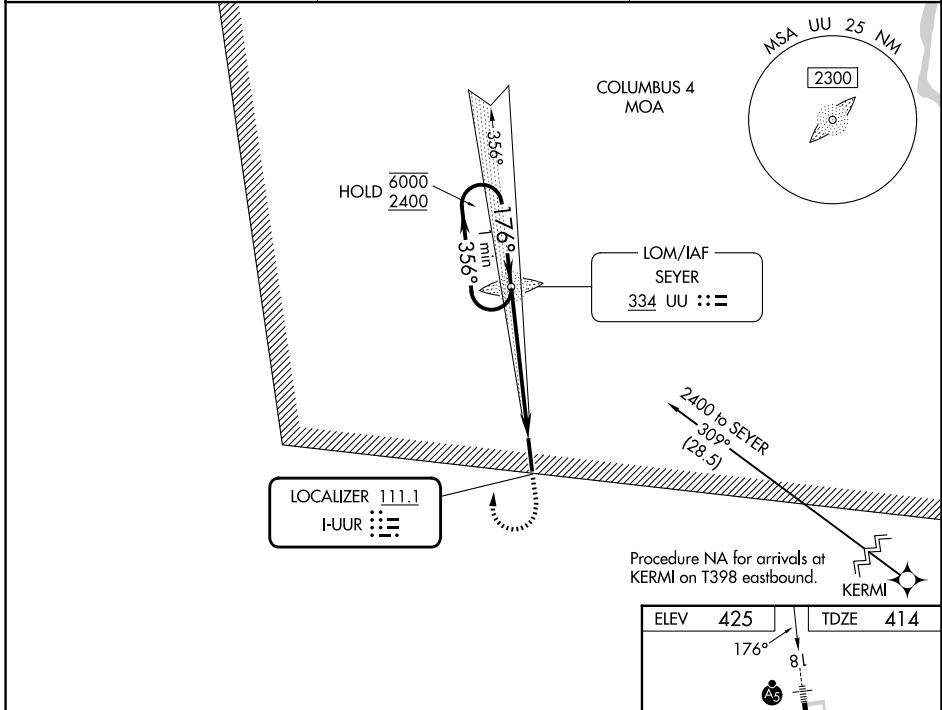

ELEV 425	TDZE 414
176°	
81	
6500 x 100	
0.3% UP	
36	
MIRL Rwy 18-36 1	
FAF to MAP 5.5 NM	
Knots	60 90 120 150 180
Min:Sec	5:30 3:40 2:45 2:12 1:50

CATEGORY	A	B	C	D
S-ILS 18	614-½		200 (200-½)	
S-LOC 18	1020-½	606 (600-½)	1020-1¾	606 (600-1¾)
CIRCLING	1020-1	595 (600-1)	1100-2 675 (700-2)	1160-2¼ 735 (800-2¼)

SC-4, 11 JUN 2026 to 09 JUL 2026

SC-4, 11 JUN 2026 to 09 JUL 2026