# ILS or LOC RWY 5

CHESAPEAKE RGNL (CPK)

| LOC/DME I-EYK | APP CRS | Rwy Ldg 5500 |
|---|---|---|
| 111.7 | 048° | TDZE 18 |
| Chan 54 | | Apt Elev 19 |

When local altimeter setting not received, use ORF altimeter setting and increase DA to 256 feet; increase all MDAs 40 feet and CEKAD fix minimums S-LOC 5 visibility Cats C and D 1⅛ SM. For inop ALS, increase S-LOC 5 Cats C and D visibility to 1⅜ SM.

MALSR

MISSED APPROACH: Climb to 500 then climbing left turn to 2000 on heading 190° and ORF VORTAC R-216 to NALDE INT/I-EYK 12.3 DME and hold.

| AWOS-3 | NORFOLK APP CON | GCO | UNICOM |
|---|---|---|---|
| 123.675 | 118.9 353.7 | 135.075 | 123.075 (CTAF) L |

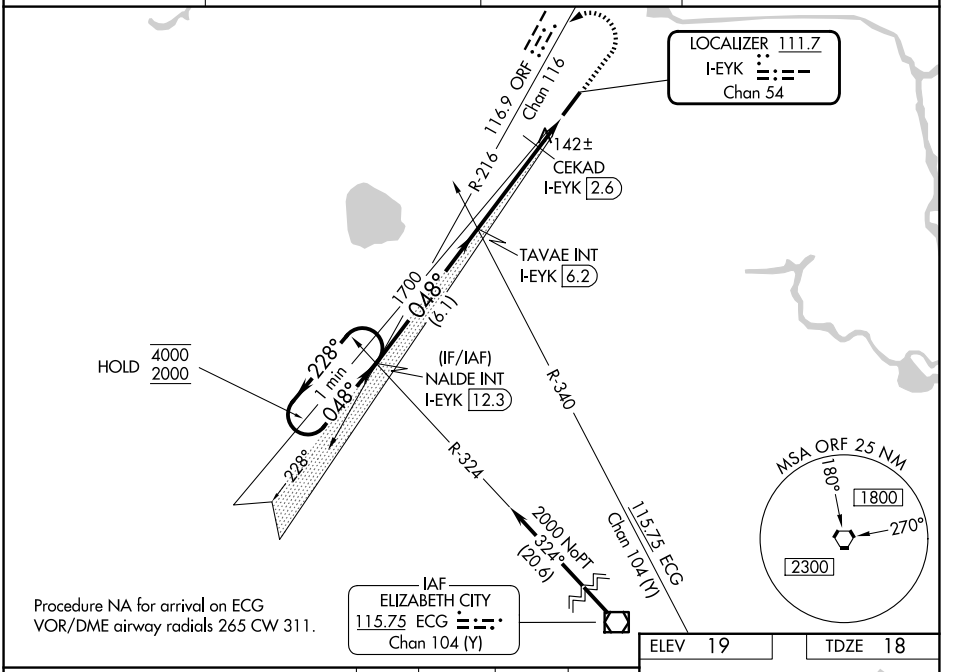


ELEV 19 TDZE 18

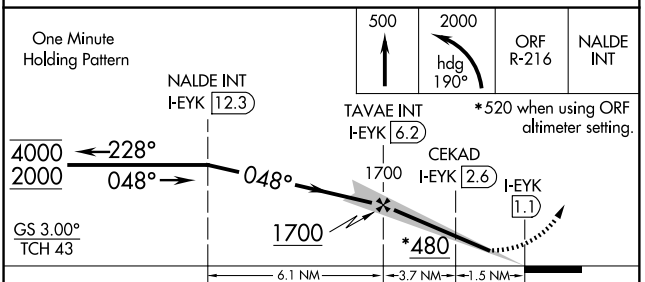


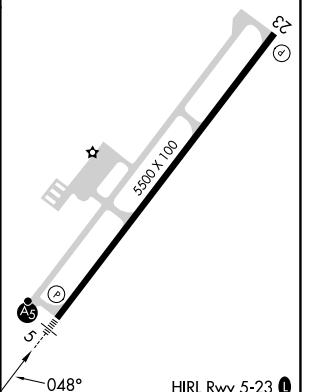


| CATEGORY | A | B | C | D |
|---|---|---|---|---|
| S-ILS 5 | 218-½ 200 (200-½) | | | |
| S-LOC 5 | 480-½ 462 (500-½) | | 480-1 462 (500-1) | |
| CIRCLING | 480-1 461 (500-1) | | 520-1½ 501 (600-1½) | 580-2 561 (600-2) |
| CEKAD FIX MINIMUMS | | | | |
| S-LOC 5 | 400-½ 382 (400-½) | | 400-⅝ 382 (400-⅝) | |
| CIRCLING | 460-1 441 (500-1) | 480-1 461 (500-1) | 520-1½ 501 (600-1½) | 580-2 561 (600-2) |

FAF to MAP 5.2 NM

| Knots | 60 | 90 | 120 | 150 | 180 |
|---|---|---|---|---|---|
| Min:Sec | 5:12 | 3:28 | 2:36 | 2:05 | 1:44 |



NE-3, 11 JUN 2026 to 09 JUL 2026
NE-3, 11 JUN 2026 to 09 JUL 2026