

WAAS CH <b>49138</b> <b>W09A</b>	APP CRS <b>089°</b>	Rwy Ldg TDZE Apt Elev	<b>4043</b> <b>1243</b> <b>1243</b>
--	------------------------	-----------------------------	---

# RNAV (GPS) RWY 9



CUMBERLAND MUNI (UBE)

RNP APCH - GPS.

▼ Baro-VNAV NA when using Rice Lake altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 54°C. Rwy 9 helicopter visibility reduction below ¼ SM NA. VDP NA when using Rice Lake altimeter setting. When local altimeter setting not received, use Rice Lake altimeter setting; increase LPV DA to 1536 feet and LNAV/VNAV DA to 1562 feet and all MDA 60 feet; increase LNAV/VNAV all Cats visibility 1/8 mile and increase LNAV Cat C/D visibility and Circling Cat C/D visibility 1/4 mile. Circling Rwy 18, 36 NA at night.


MISSED APPROACH:  
Climb to 3400 direct BURPS and hold.

AWOS-3PT <b>119.175</b>	MINNEAPOLIS CENTER <b>125.3 335.6</b>	GCO <b>121.725</b>	UNICOM <b>122.8 (CTAF) 0</b>
----------------------------	--	-----------------------	---------------------------------

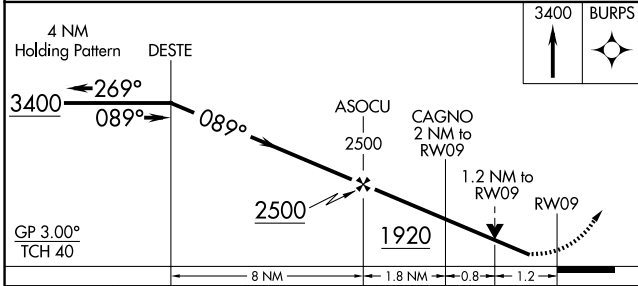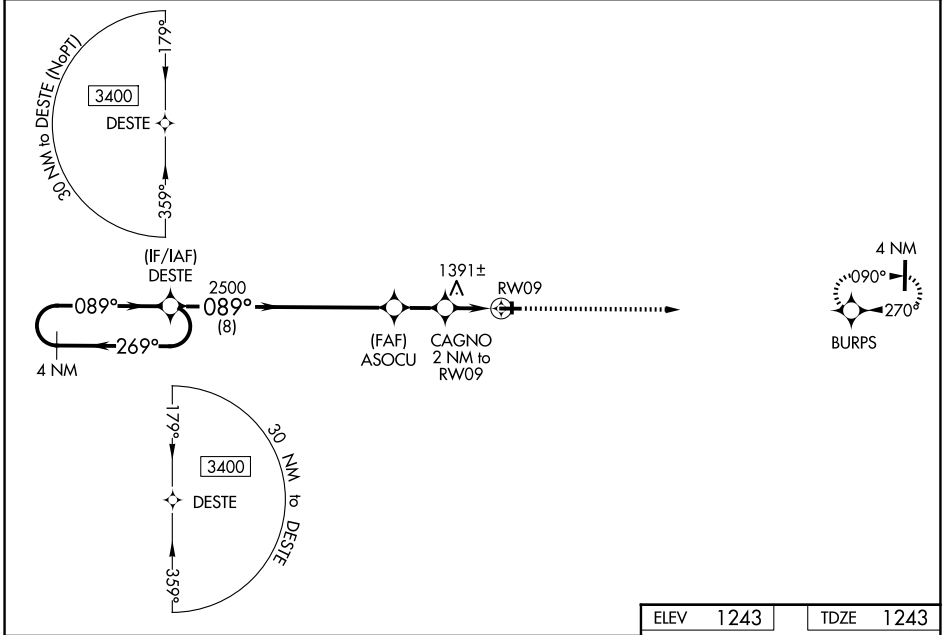

ELEV	1243	TDZE	1243
------	------	------	------

CATEGORY	A	B	1.9 NM C	D
LPV DA		1493-1	250 (300-1)	
LNAV/VNAV DA		1519-1	276 (300-1)	
LNAV MDA	1660-1	417 (500-1)	1660-1 1/8	417 (500-1 1/8)
CIRCLING	1660-1 417 (500-1)	1940-1 697 (700-1)	1940-2 697 (700-2)	1980-2 1/4 737 (800-2 1/4)

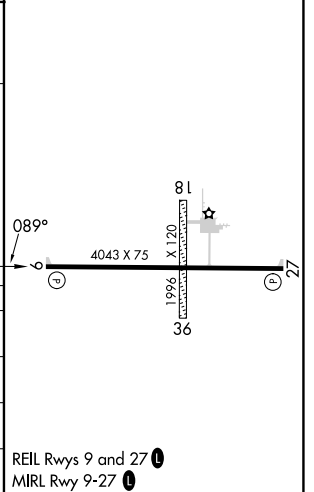

EC-3, 11 JUN 2026 to 09 JUL 2026

EC-3, 11 JUN 2026 to 09 JUL 2026