

WAAS CH <b>56440</b> <b>W06A</b>	APP CRS <b>058°</b>	Rwy Ldg TDZE Apt Elev	<b>3396</b> <b>574</b> <b>575</b>
--	------------------------	-----------------------------	---



# RNAV (GPS) RWY 6

PAGELAND (PYG)

**Baro-VNAV NA. DME/DME RNP-0.3 NA. Use Charlotte/Monroe Exec altimeter setting. When Charlotte/Monroe Exec altimeter not received, use Charlotte/Douglas Intl altimeter setting and increase LPV DA to 943 feet and all visibilities 1/8 SM. Increase LNAV/VNAV DA to 1139 feet and all visibilities 1/4 SM. Increase all MDA 60 feet.**


**NA MISSED APPROACH:** Climb to 2400 direct WOVEX and hold.

EQY ASOS <b>135.775</b>	CHARLOTTE APP CON <b>120.05 307.8</b>	(CTAF) <b>122.9</b>
----------------------------	--	------------------------

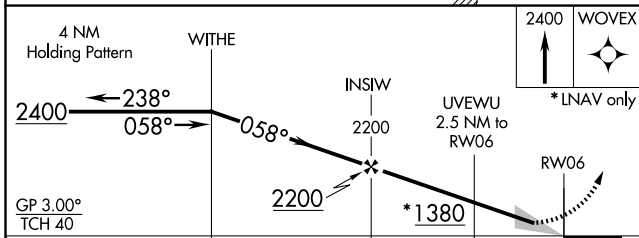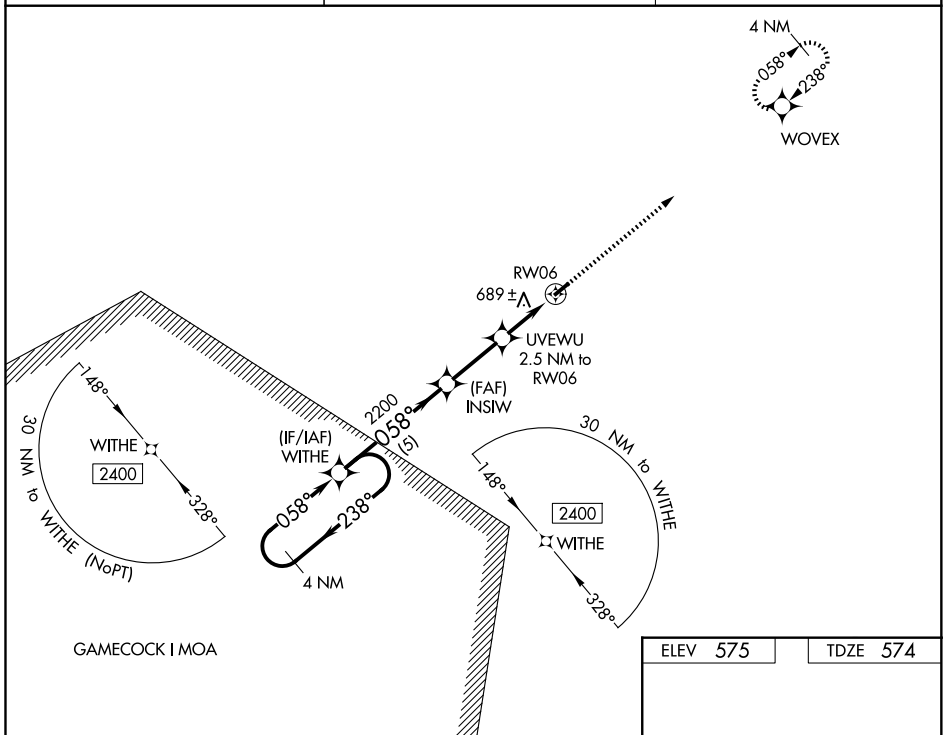

ELEV 575	TDZE 574
----------	----------

CATEGORY	A	B	C	D
LPV DA	889-1 1/8	315 (400-1 1/8)		NA
LNAV/VNAV DA	1085-1 1/8	511 (600-1 1/8)		NA
LNAV MDA	1020-1	446 (500-1)		NA
CIRCLING	1100-1 1/8	525 (600-1 1/8)		NA

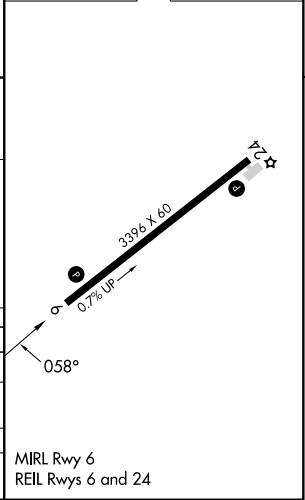

SE-2, 11 JUN 2026 to 09 JUL 2026

SE-2, 11 JUN 2026 to 09 JUL 2026