



| | | | |
|--|------------------------|---|-------------|
| WAAS CH 42623 W01A | APP CRS 006° | Rwy Idg TDZE 346 Apt Elev 357 | 5009 |
|--|------------------------|---|-------------|

RNAV (GPS) RWY 1


RICHARD ARTHUR FLD (M95)

| | | |
|-----------|---|--|
| RNP APCH. | <p>Procedure NA at night. Rwy 1 helicopter visibility reduction below 1 SM NA. Baro-VNAV NA. Use Jasper altimeter setting; when not received, use Tuscaloosa altimeter setting and increase LPV DA to 680, LNAV/VNAV DA to 1008, and all MDA 20 feet; increase LNAV/VNAV all Cat visibility ½ SM.</p> | MISSED APPROACH: Climb to 2600 direct TASEE and hold. |
|-----------|---|--|

| | | |
|--------------------------------|---|---------------------------------|
| JFX AWOS-3PT 119.225 | COLUMBUS APP CON * 126.075 239.25 | UNICOM 122.8 (CTAF) 0 |
|--------------------------------|---|---------------------------------|

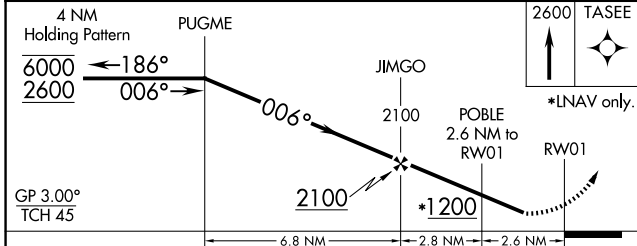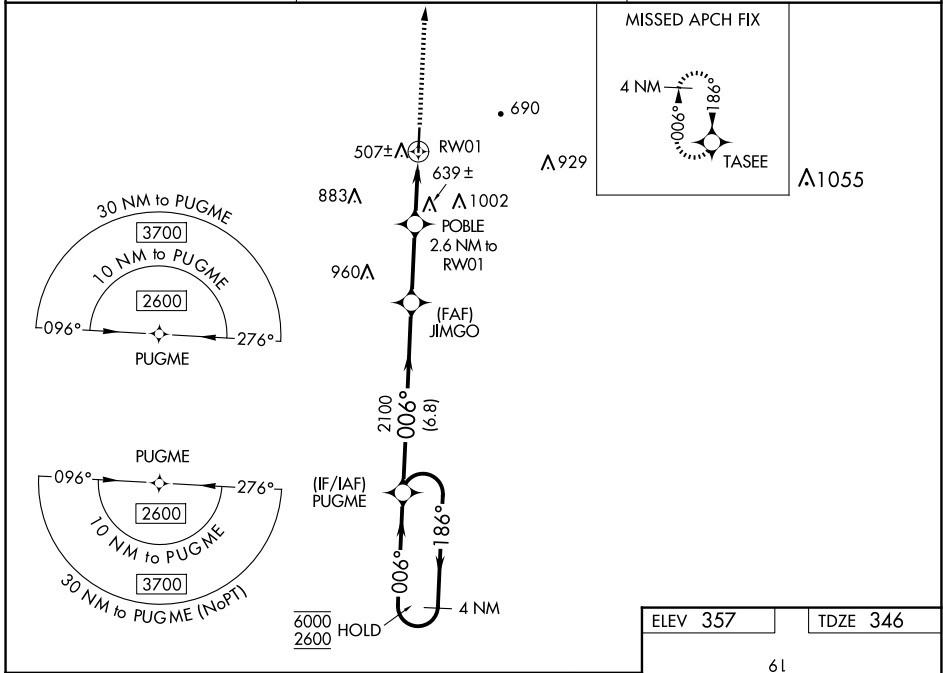

| CATEGORY | A | B | C | D |
|--------------|-----------------------|-----------------------|-----------------|-----------------|
| LPV DA | 679-1 1/8 | | 333 (400-1 1/8) | |
| LNAV/VNAV DA | 1007-2 1/4 | | 661 (700-2 1/4) | |
| LNAV MDA | 980-1 | 634 (700-1) | 980-1 7/8 | 634 (700-1 7/8) |
| CIRCLING | 1020-1 663 (700-1) | 1060-1 703 (800-1) | 1400-3 | 1043 (1100-3) |

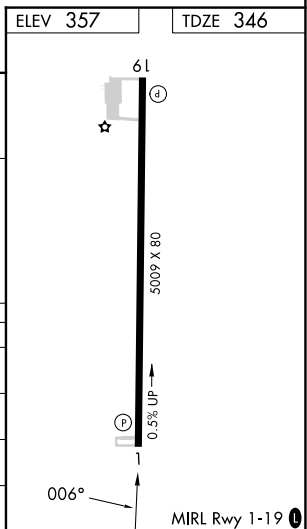

SE-4, 11 JUN 2026 to 09 JUL 2026

SE-4, 11 JUN 2026 to 09 JUL 2026