

APP CRS
178°

Rwy Ldg
TDZE **916**
Apt Elev **916**

RNAV (GPS) RWY 18

GOULD PETERSON MUNI (K57)

RNP APCH - GPS.


▼

NA

Rwy 18 helicopter visibility reduction below 1 SM NA.
Use Shenandoah altimeter setting; when not received, use Clarinda altimeter setting and increase all MDAs 20 feet and visibility LNAV Cat C ½ SM.
Straight-in Rwy 18 NA at night, Circling Rwy 18 NA at night.

MISSED APPROACH: Climb to 4000
direct IDOYE and hold, continue
climb-in-hold to 4000.

SDA AWOS-3 125.525	MINNEAPOLIS CENTER 119.6 290.4	CTAF 122.9
------------------------------	--	----------------------

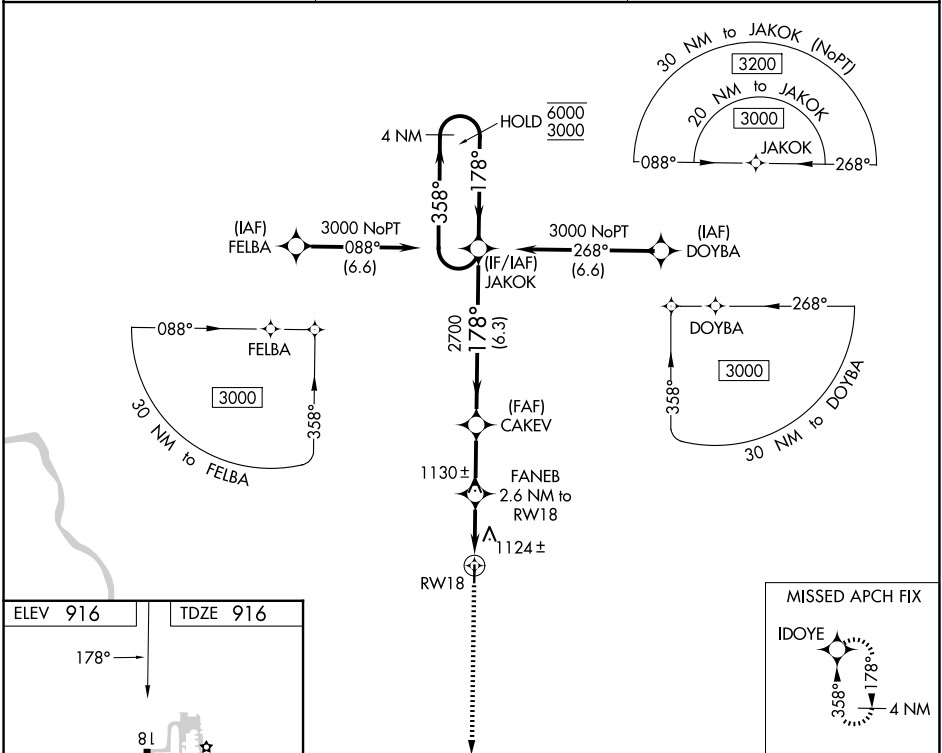

ELEV 916

TDZE 916

178°

81

3600 X 75

36

4000

IDOYE

JAKOK

4 NM Holding Pattern

358°

178°

6000

3000

CAKEV

FANEB 2.6 NM to RWY 18

3.25°

TCH 40

2700

1840

2.6 NM

2.5 NM

6.3 NM

CATEGORY	A	B	C	D
LNAV MDA	1 440-1	524 (600-1)	1 440-1½ 524 (600-1½)	NA
CIRCLING	1 520-1 604 (700-1)	1 540-1 624 (700-1)	1 680-2¼ 764 (800-2¼)	NA

MIRL Rwy 18-36

REIL Rws 18 and 36