

WAAS CH 86539 W25A	APP CRS 253°	Rwy Ldg TDZE 5140 Apt Elev 5176
--	------------------------	---


RNAV (GPS) RWY 25
ROOSEVELT MUNI (74V)

⚠ NA

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -25°C (-13°F) or above 48°C (119°F). Baro-VNAV and VDP NA when using Vernal altimeter setting. DME/DME RNP-0.3 NA. When local altimeter setting not received, use Vernal altimeter setting: increase LPV DA to 5466 and visibility ½ SM, LNAV/VNAV DA to 5628 and visibility ½ SM; increase all MDAs 80 feet and LNAV visibility Cat C and D ½ SM and Circling Cat C visibility ½ SM.

MISSED APPROACH: Climb to 5700 then climbing left turn to 10500 direct IGEHU and hold, continue climb-in-hold to 10500.

AWOS-3P 118.975	SALT LAKE CENTER 135.77 257.7	UNICOM 122.8 (CTAF) 0
---------------------------	---	---------------------------------

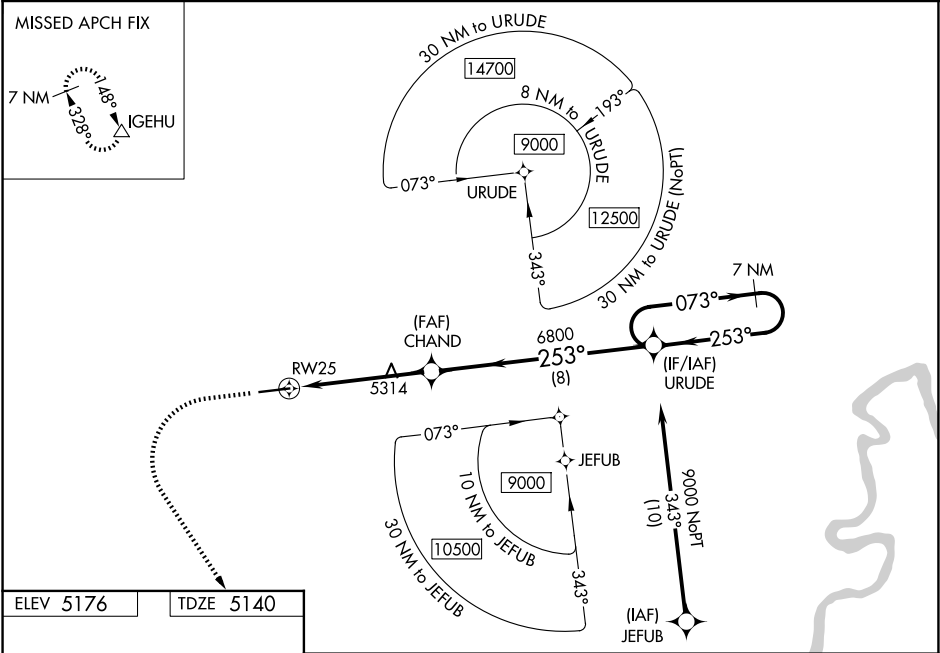

ELEV 5176	TDZE 5140
	5700 10500 IGEHU VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 40). CHAND 6800 URUDE 9000 7 NM Holding Pattern 073° 253° GP 3.00° TCH 51
*LNAV only.	
*1.4 NM to RW25	
1.4 NM 3.8 NM 8 NM	
CATEGORY	A B C D
LPV DA	5390-1 250 (300-1)
LNAV/VNAV DA	5552-1½ 412 (400-1½)
LNAV MDA	5580-1 440 (500-1) 5580-1¼ 440 (500-1¼)
CIRCLING	5740-1 564 (600-1) 5900-1 724 (800-1) 6020-2½ 844 (900-2½) 6340-3 1164 (1200-3)