


Baro-VNAV NA. DME/DME RNP-0.3 NA. Use Tupelo altimeter setting; when not received, use Columbus Air Force Base altimeter setting and increase all DA 41 feet and all MDA 60 feet, increase LPV and LNAV/VNAV all Cats visibility 1/8 mile, LNAV Cat C visibility 1/2 mile. Rwy 18 helicopter visibility reduction below 3/4 SM NA.

MISSED APPROACH:
Climb to 2000 direct MUMDE and hold.

COLUMBUS APP CON ★
126.075 229.15

CTAF
122.9 0

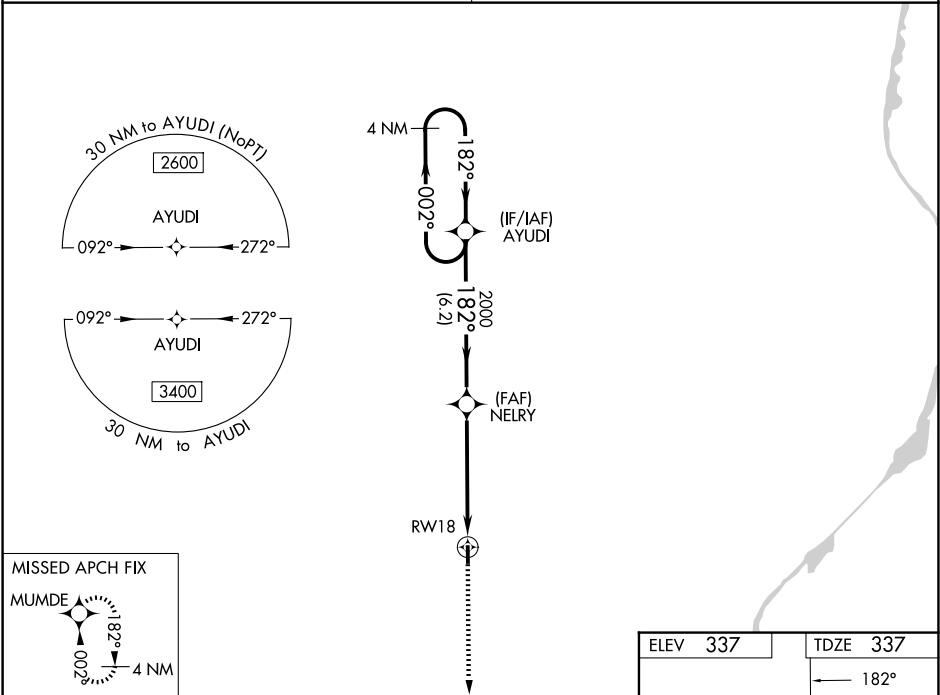

4 NM Holding Pattern				
AYUDI				
2600 ← 002° / 182° → 2000				
GP 3.00° TCH 40				
NELRY 2000				
RWY 18				
6.2 NM 5.1 NM				
CATEGORY	A	B	C	D
LPV DA	624-1 287 (300-1)			NA
LNAV/VNAV DA	669-1 332 (400-1 1/8)			NA
LNAV MDA	820-1 483 (500-1)		820-1 483 (500-1 3/8)	NA
CIRCLING	920-1 583 (600-1)		1080-2 743 (800-2 1/4)	NA

