

WAAS CH 62830 W14A	APP CRS 137°	Rwy Ldg TDZE 2608 Apt Elev 2613
--	------------------------	---

RNAV (GPS) RWY 14
PECOS MUNI (PEQ)

RNP APCH - GPS.


▼

▲

Circling Rwy 9, 27 NA at night. Baro-VNAV and VDP NA when using Wink altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -20°C or above 54°C. When local altimeter setting not received, use Wink altimeter setting and increase LPV DA to 2903 feet and all visibilities ¼ SM. Increase LNAV/VNAV DA to 3004 feet and all visibilities ¼ SM. Increase all MDAs 100 feet and LNAV visibility Cat C/D ¼ SM, and Circling visibility Cat C/D ¼ SM.

MISSED APPROACH:
Climb to 4500 direct HUGPA and hold.

AWOS-3 118.175	ALBUQUERQUE CENTER 135.875 292.15	UNICOM 122.8 (CTAF) 0
--------------------------	---	---------------------------------

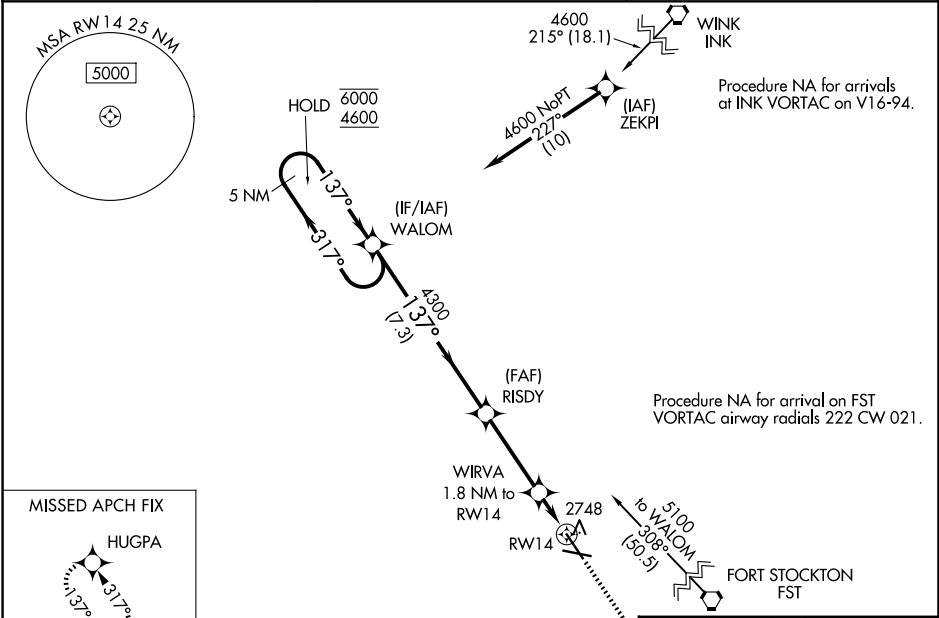

MISSED APCH FIX HUGPA	ELEV 2613	TDZE 2608
--------------------------	-----------	-----------

5 NM Holding Pattern

WALOM

6000
4600

317°
137°

GP 3.00°
TCH 40

7.3 NM
3.4 NM
0.7
1.1 NM

4300
3220


RISDY
4300

WIRVA
1.8 NM to RW14

1.1 NM to RW14

RW14

CATEGORY	A	B	C	D
LPV DA		2808-¾ 200 (200-¾)		
LNAV/VNAV DA		2909-7/8 301 (300-7/8)		
LNAV MDA	3000-1	392 (400-1)	3000-1½ 392 (400-1½)	
CIRCLING	3060-1 447 (500-1)	3140-1 527 (600-1)	3360-2¼ 747 (800-2¼)	3360-2½ 747 (800-2½)

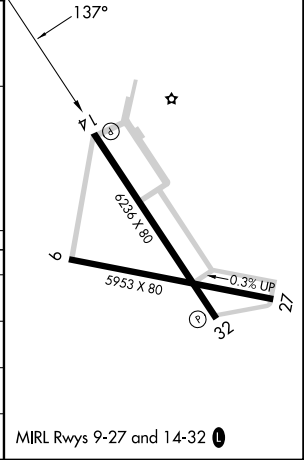

SC-3, 06 AUG 2026 to 03 SEP 2026

SC-3, 06 AUG 2026 to 03 SEP 2026