

LOC/DME I-NEW	APP CRS	Rwy Ldg	5510
111.3	177°	TDZE	8
Chan 50		Apt Elev	8

ILS or LOC RWY 18R

LAKEFRONT (NEW)

⚠


⚠

Inop table does not apply to S-ILS 18R. For inop MALSR when using Louis Armstrong New Orleans Intl altimeter setting, increase S-LOC 18R Cats A-C visibility to 1 mile. For inop MALSR, increase S-LOC 18R all Cats visibility to 1 mile. DME or RADAR required. Visibility reduction by helicopters NA. When local altimeter setting not received, use Louis Armstrong New Orleans Intl altimeter setting and increase all DA 29 feet and all MDA 40 feet; increase Circling Cat D visibility ¼ mile.

MALSR

MISSED APPROACH: Climb to 500 then climbing left turn to 2100 on HRV VORTAC R-016 to SNAKI INT and hold.

ATIS	NEW ORLEANS APP CON	LAKEFRONT TOWER ★	GND CON
124.9	133.15 290.3 (N) 123.85 256.9 (S)	118.95 (CTAF) 0	121.7 335.575

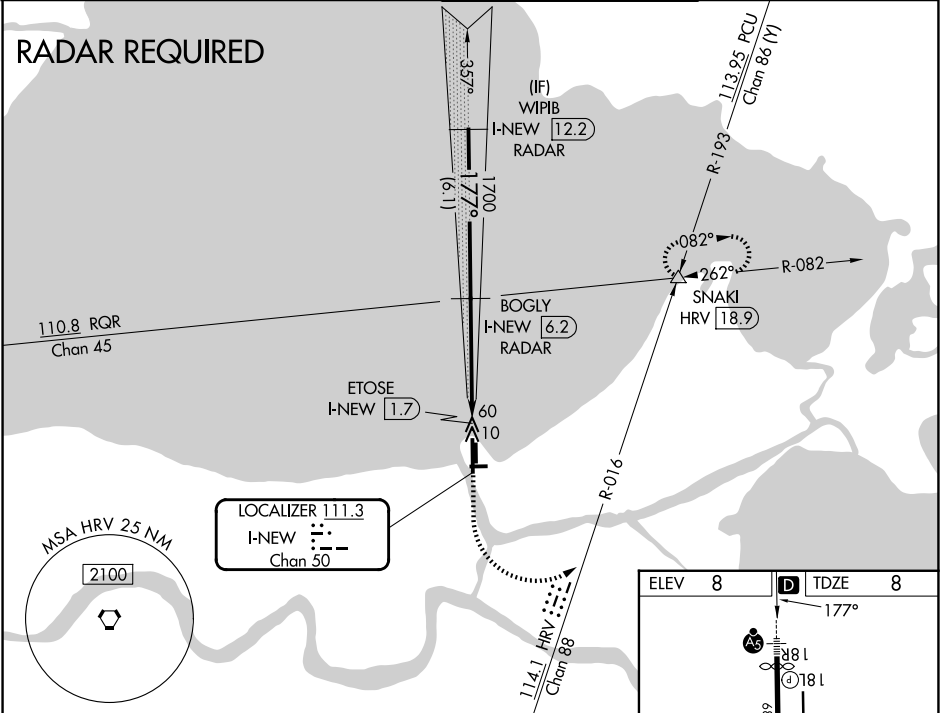

WPIB I-NEW 12.2 RADAR

BOGLY I-NEW 6.2 RADAR

ETOSE I-NEW 1.7

Procedure Turn NA

GS 3.00° TCH 48

1700 177° 1700

6.1 NM 4.5 NM 0.6

500 2100

HRV R-016

SNAKI

ELEV 8 TDZE 8

177°

181 181 36R 36L

36R 36L

3114 X 75

27

TWR

MIRL Rwy 18R-36L

MIRL Rwys 9-27 and 18L-36R

REIL Rwys 9, 18L, 36L and 36R

FAF to MAP 4.5 NM

Knots	60	90	120	150	180
Min:Sec	4:30	3:00	2:15	1:48	1:30

CATEGORY	A	B	C	D
S-ILS 18R		258-3/4	250 (300-3/4)	
S-LOC 18R		320-3/4	312 (400-3/4)	
CIRCLING	480-1 472 (500-1)	520-1 512 (600-1)	700-2 692 (700-2)	820-2 3/4 812 (900-2 3/4)