
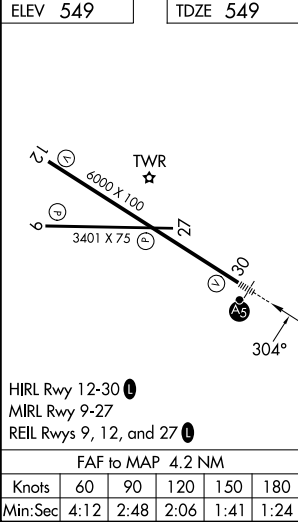


LOC/DME I-JEF 110.5 Chan 42	APP CRS 304°	Rwy Ldg TDZE Apt Elev	6000 549 549
---	------------------------	-----------------------------	---

ILS or LOC RWY 30

JEFFERSON CITY MEML (JEF)

ADF required.		MALSR	MISSED APPROACH: Climb to 1500 then climbing left turn to 2800 direct ALGOA LOM and hold, continue climb-in-hold to 2800.	
Circling Rwy 9 NA at night. For inop ALS increase S-LOC 30 Cats C/D visibility to 1¾ SM and WAPGY fix minimums: S-LOC 30 Cats C/D visibility to 1 SM.				
ASOS 133.625	MIZZU APP CON 124.375 353.925	JEFFERSON CITY TOWER★ 125.6 (CTAF) 0	GND CON 121.7	UNICOM 122.95

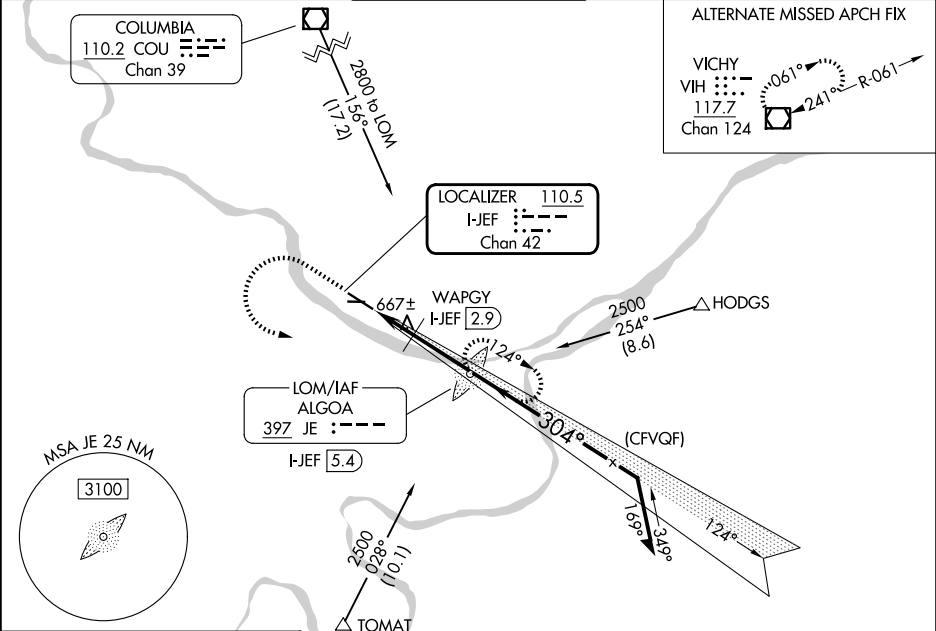

1500 ↑	2800 ↖	JE 	JE LOM ALGOA I-JEF 5.4	VGSI and ILS glidepath not coincident (VGSI Angle 3.00/TCH 50).
			1941	Remain within 10 NM
			124°	2500
			304°	2000
			1160	GS 3.00° TCH 54
			1 NM	0.8
			2.5 NM	
CATEGORY	A	B	C	D
S-ILS 30	749-½ 200 (200-½)			
S-LOC 30	1160-½	611 (700-½)	1160-1⅜	611 (700-1⅜)
CIRCLING	1280-1	731 (800-1)	1320-2¼ 771 (800-2¼)	1560-3 1011 (1100-3)
WAPGY FIX MINIMUMS				
S-LOC 30	920-½	371 (400-½)	920-5⁄8	371 (400-5⁄8)
CIRCLING	1280-1	731 (800-1)	1320-2¼ 771 (800-2¼)	1560-3 1011 (1100-3)