



KING SALMON, ALASKA

26190

HI-ILS Z or LOC Z RWY 12

LOC/DME I-AKN 110.3 Chan 40	APCH CRS 121°	Rwy Idg TDZE 62 Arpt Elev 73	8501 62 73	[USAF]	KING SALMON (AKN) (PAKN)
-----------------------------------	------------------	--	------------------	--------	--------------------------

DME required. RADAR required for procedure entry.

▼

* When ALS inop, increase RVR to 40.
** When ALS inop, increase RVR to 55.

☼


-31° C

MALSR

MISSED APPROACH: Climb to 600, then climbing right turn to 3000 via heading 240° and AKN VORTAC R-210 to OLLER/AKN 15 DME and hold.

ATIS 128.8	ANCHORAGE CENTER 124.8 354.0	TOWER★ 118.3 279.5	GND CON 121.9	CTAF 121.90 352.05	UNICOM 122.95
---------------	---------------------------------	-----------------------	------------------	-----------------------	------------------

† When control tower closed, increase RVR to 50.
Autopilot coupled approaches not authorized below 700' MSL.

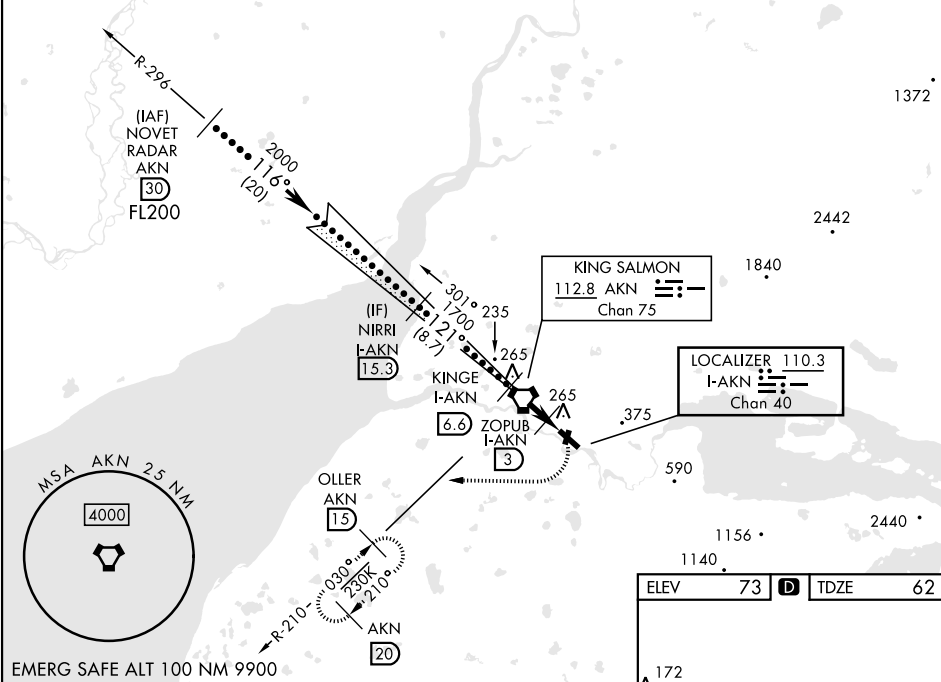

EMERG SAFE ALT 100 NM 9900

NOVET RADAR 30 FL200

Intcp Lczt NIRRI I-AKN 15.3

KINKE I-AKN 6.6

ZOPUB I-AKN 3

OLLER AKN 15

600

3000

Intcp AKN R-210

OLLER AKN 15

Use I-AKN DME when on localizer course

GS 3.00°

TCH 66

1700

560

3.6 NM

1.3 NM

CATEGORY	C	D	E
S-ILS 12†	262/24	200 (300-½)	
S-LOC 12**†	420/30	358 (400-¾)	
CIRCLING	580-1½ 507 (600-1½)	900-2¾ 827 (900-2¾)	960-3 887 (900-3)

HRL Rwy 12-30

MRL Rwy 18-36

Amtd 8 22APR21

HI-ILS Z or LOC Z RWY 12

