

WAAS CH 66023 W04A	APP CRS 040°	Rwy Ldg 4501 TDZE 1944 Apt Elev 1961
--	------------------------	---



RNAV (GPS) RWY 4

RNP APCH - GPS.

▼ Baro-VNAV and VDP NA when using GRI altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -24°C or above 54°C. When local altimeter setting not received, use GRI altimeter setting and increase LPV DA to 2262 feet and all visibilities $\frac{1}{8}$ SM. Increase LNAV/VNAV DA to 2414 feet and all visibilities $\frac{1}{4}$ SM. Increase all MDAs 80 feet and LNAV visibility Cat C $\frac{1}{8}$ SM, and Circling visibility Cat C $\frac{1}{4}$ SM.

MISSED APPROACH: Climb to 4000
direct DECNE and on track 082° to
ROMAD and hold.

ASOS 120.525	MINNEAPOLIS CENTER 119.4 278.8	UNICOM 122.8 (CTAF) 0
------------------------	--	---------------------------------

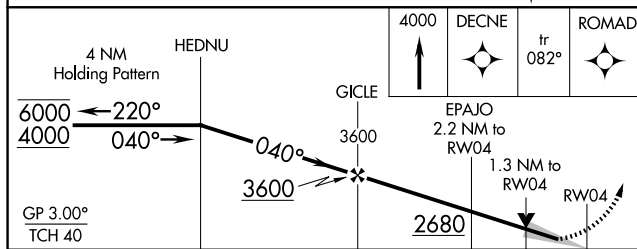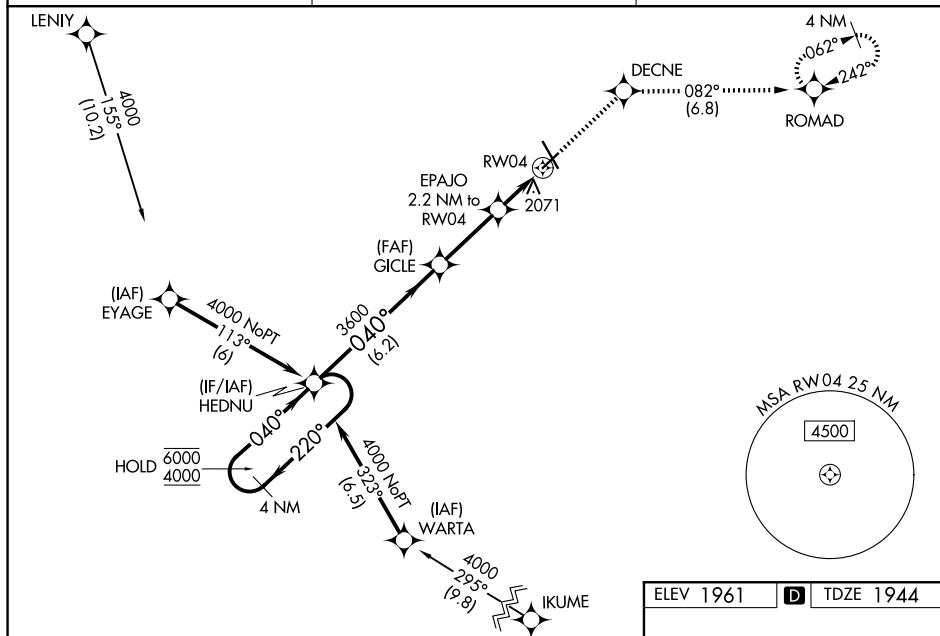

		6.2 NM		2.9 NM		1 NM		1.3 NM	
CATEGORY		A		B		C		D	
LPV	DA	2194-1		250 (300-1)				NA	
LNAV/ VNAV	DA	2346-1 $\frac{1}{8}$		402 (400-1 $\frac{1}{8}$)				NA	
LNAV	MDA	2380-1		436 (500-1)		2380-1 $\frac{1}{4}$ 436 (500-1 $\frac{1}{4}$)		NA	
CIRCLING		2380-1 419 (500-1)		2540-1 579 (600-1)		2540-1 $\frac{1}{2}$ 579 (600-1 $\frac{1}{2}$)		NA	

