


WAAS CH 87030 W13A	APP CRS 135°	Rwy Ldg TDZE Apt Elev	5000 1203 1204
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 13

ARTHUR N NEU (CIN)

RNP APCH - GPS.		MISSED APPROACH: Climb to 3000 direct COHGI and hold.
▼ ▲ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 54°C. Baro-VNAV and VDP NA when using Audubon altimeter setting. When local altimeter setting not received, use Audubon altimeter setting: increase LPV DA to 1515 feet; increase LNAV/VNAV DA to 1669 feet and all visibilities ¼ SM; increase all MDAs 80 feet and visibility Cat C ¼ SM.		
AWOS-3 118.025	MINNEAPOLIS CENTER 134.0 288.3	UNICOM 122.8 (CTAF) 0

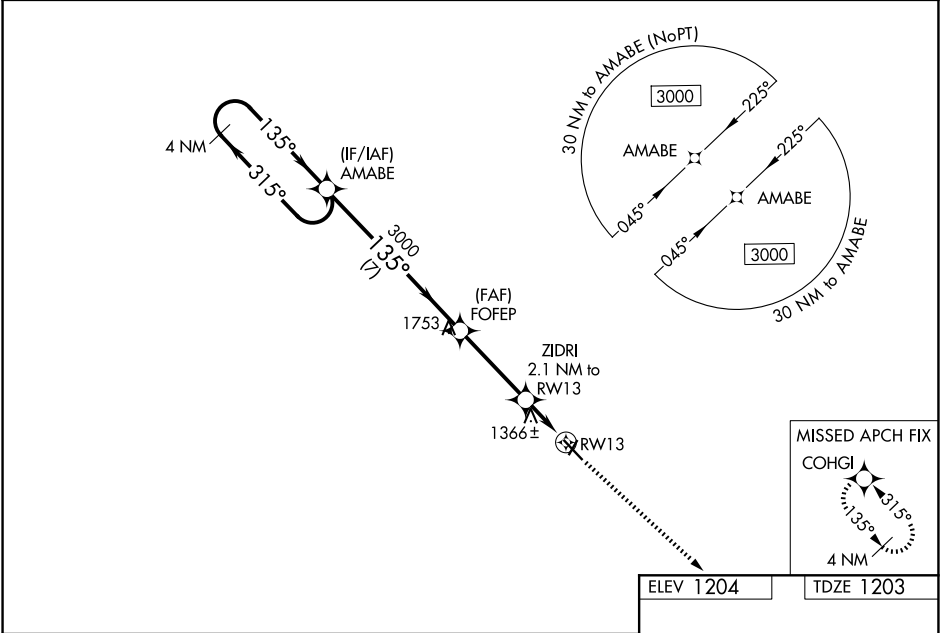

VGSI and RNAV glidepath not coincident
(VGSI Angle 3.00°/TCH 26).

4 NM Holding Pattern

GP 3.00°
TCH 40


7 NM

3.4 NM

0.9

1.2 NM

CATEGORY	A	B	C	D
LPV DA	1453-1	250 (300-1)		NA
LNAV/VNAV DA	1607-1⅜	404 (500-1⅜)		NA
LNAV MDA	1620-1	417 (500-1)	1620-1⅛ 417 (500-1⅛)	NA
CIRCLING	1740-1	536 (600-1)	1980-2¼ 776 (800-2¼)	NA

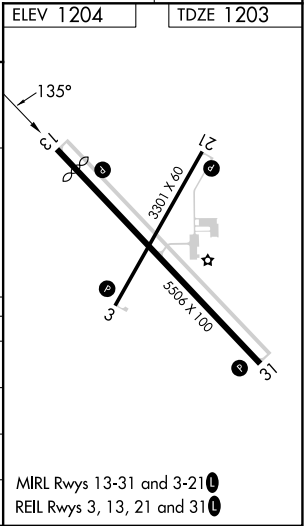

NC-3, 06 AUG 2026 to 03 SEP 2026

NC-3, 06 AUG 2026 to 03 SEP 2026