

WAAS CH 40336 W04A	APP CRS 043°	Rwy Ldg TDZE 92 Apt Elev 92	4505
--	------------------------	---	-------------

RNAV (GPS) RWY 4


MARION COUNTY (MAO)

⚠

Baro-VNAV NA when using Florence altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -8°C (18°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. Helicopter visibility reduction below ¾ SM NA. When local glimmer setting not received, use Florence altimeter setting and increase all DA 53 feet and all visibilities ¼ mile, increase all MDA 60 feet and all Cat C/D visibilities ¼ mile.

MISSED APPROACH:
Climb to 2000 direct
SEROY and hold.

AWOS-3PT 119.875	FLORENCE APP CON ★ 135.25 316.15	UNICOM 122.8 (CTAF)
----------------------------	--	-------------------------------

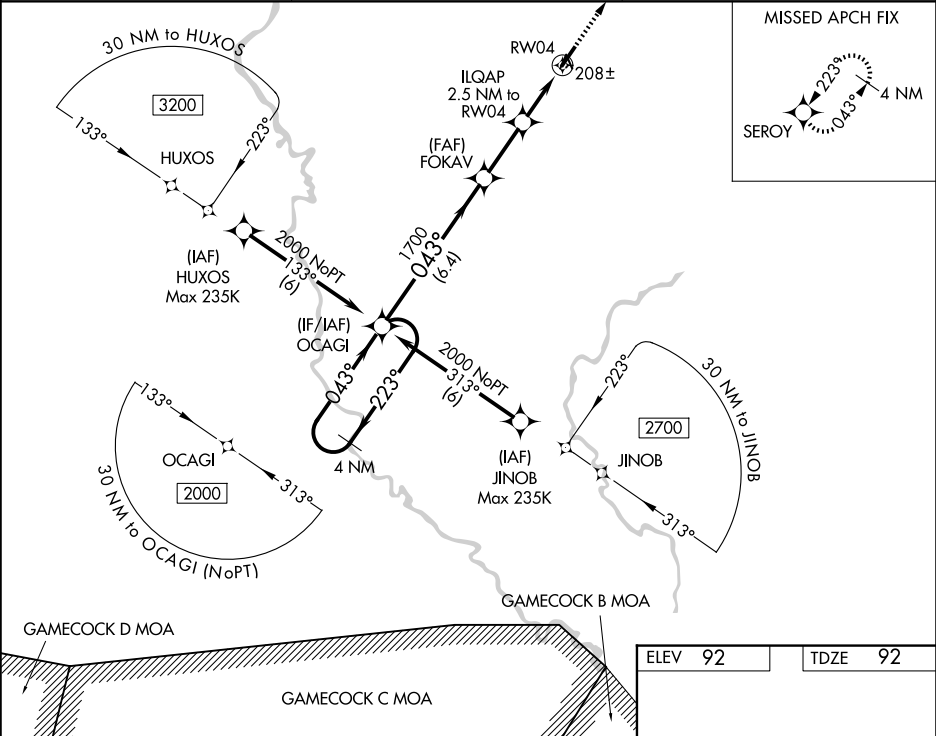

4 NM Holding Pattern

2000 ← 223°
043° →

GP 3.00°
TCH 39

OCAGI

FOKAV

ILQAP

RW04

2000

SEROY

*LNAV only.

1700

*920

6.4 NM

2.4 NM

2.5 NM

CATEGORY	A	B	C	D
LPV DA	342-7⁄8	250 (300-7⁄8)	342-1	250 (300-1)
LNAV/VNAV DA	369-7⁄8	277 (300-7⁄8)	369-1	277 (300-1)
LNAV MDA	460-1		368 (400-1)	
CIRCLING	720-1	628 (700-1)	720-1¾ 628 (700-1¾)	960-2¾ 868 (900-2¾)

