

WAAS CH 65901 W04A	APP CRS 037°	Rwy Ldg 6497 TDZE 863 Apt Elev 869
--	------------------------	---

RNAV (GPS) RWY 4

LEE C FINE MEML (AIZ)

RNP APCH - GPS.	
-----------------	--


T Rwy 4 helicopter visibility reduction below 1 SM NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. Baro-VNAV and YDP NA when using OZS altimeter setting. When local altimeter setting not received, use OZS altimeter setting and increase LPV DA to 1204 feet. Increase LNAV/VNAV DA to 1163 feet and all visibilities ½ SM. Increase all MDAs 60 feet and LNAV visibility Cat C ½ SM.

MISSED APPROACH: Climb to 3000
direct NOSCE and hold.


AWOS-3PT
135.325

MIZZU APP CON
124.1 353.925


UNICOM
122.8 (CTAF)

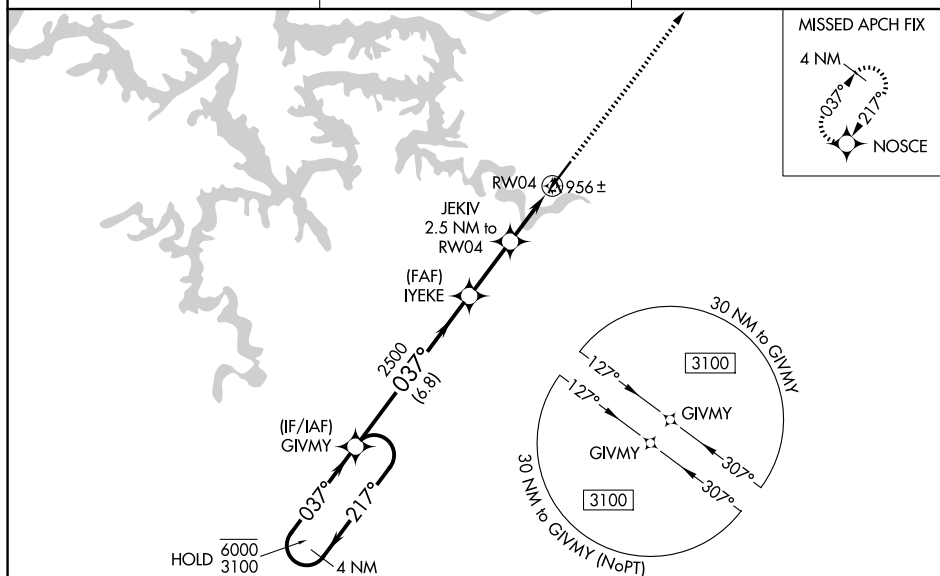

ELEV 869		TDZE 863
----------	--	----------

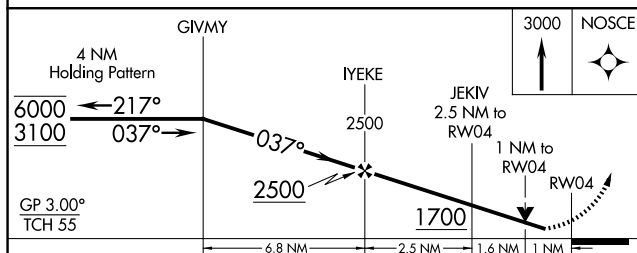

CATEGORY		A	B	C	D
LPV	DA	1155-1	292 (300-1)		NA
LNAV/ VNAV	DA	1114-1	251 (300-1)		NA
LNAV	MDA	1220-1	357 (400-1)		NA

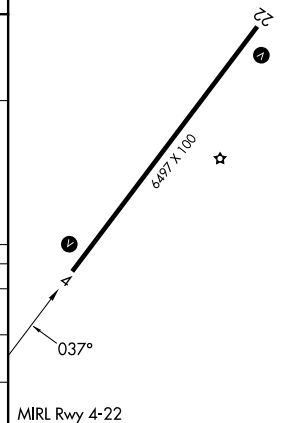

RNAV (GPS) RWY 4