


WAAS CH 45722 W11A	APP CRS 110°	Rwy Ldg 4876 TDZE 854 Apt Elev 871
--	------------------------	---

RNAV (GPS) RWY 11


LEBANON SPRINGFIELD/GEORGE HOERTER FLD (6I2)

RNP APCH. ▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. ▲ When local altimeter setting not received, use Danville altimeter setting and increase all DA 74 feet and all MDA 80 feet. Increase LPV, LNAV/VNAV, and Circling Cat D visibility ¼ mile and LNAV Cats C/D ⅓ mile. Baro-VNAV NA when using Danville altimeter setting.	MISSED APPROACH: Climb to 4000 direct WOBIL and hold, continue climb-in-hold to 4000.
---	---

AWOS-3P 119.725	LOUISVILLE APP CON 132.075 327.0	UNICOM 122.8 (CTAF) 0
---------------------------	--	---------------------------------

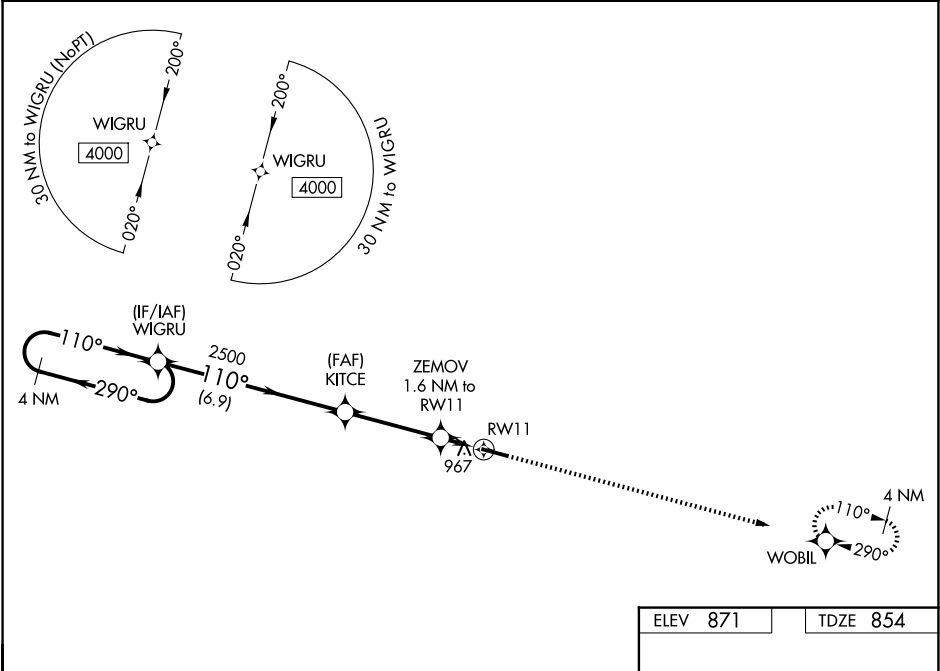

4 NM Holding Pattern WIGRU					4000	WOBIL
GP 3.00° TCH 36					*LNAV only	
6.9 NM 3.6 NM 1.6 NM						
CATEGORY	A	B	C	D		
LPV DA	1104-1		250 (300-1)			
LNAV/VNAV DA	1159-1⅓		305 (300-1⅓)			
LNAV MDA	1220-1		366 (400-1)			
CIRCLING	1320-1 449 (500-1)	1340-1 469 (500-1)	1360-1½ 489 (500-1½)	1500-2 629 (700-2)		

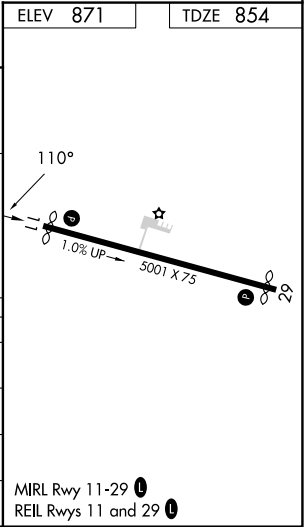

RNAV (GPS) RWY 11