

WAAS CH 77732 W18A	APP CRS 177°	Rwy Ldg TDZE 1081 Apt Elev 1088
--	------------------------	---

RNAV (GPS) RWY 18

AMERY MUNI (AHH)

RNP APCH - GPS.


▼

NA

Rwy 18 helicopter visibility reduction below 1 SM NA. Procedure NA at night. Use RNH altimeter setting; when not received, use OEO altimeter setting and increase all MDAs 20 feet and LP and LNAV visibility Cat C ½ SM, and Circling Cat C visibility ¼ SM.

MISSED APPROACH:
Climb to 3000 direct FISOM and hold.

RNH AWOS-3 120.0	MINNEAPOLIS CENTER 125.3 335.6	UNICOM 122.8 (CTAF) 0
----------------------------	--	---------------------------------

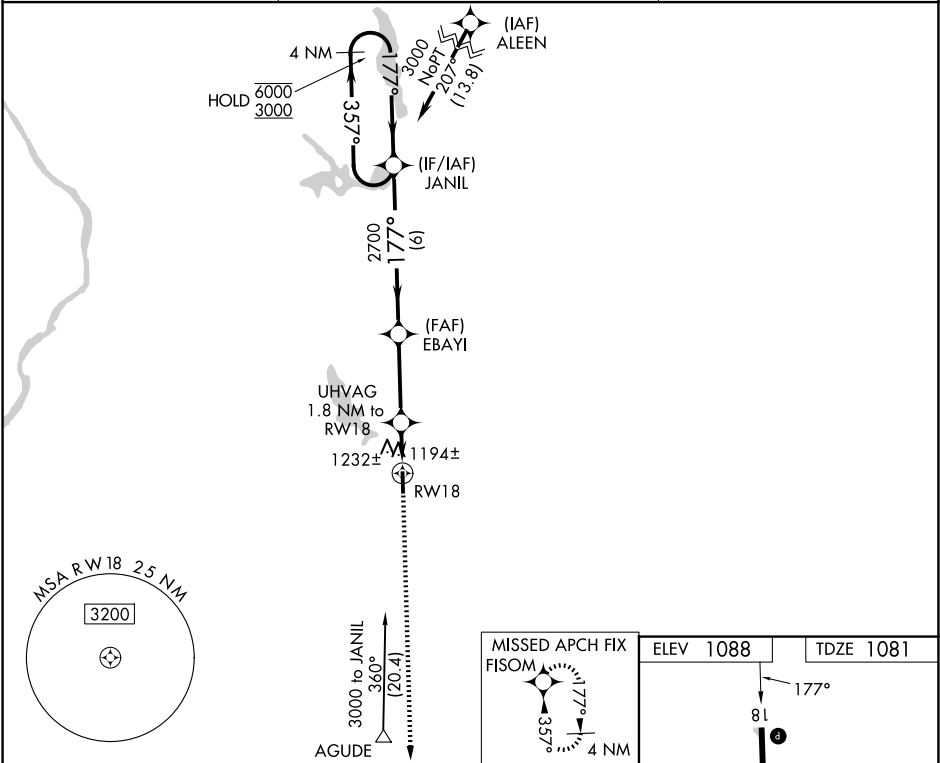

4 NM Holding Pattern		Visual Segment - Obstacles.		3000	FISOM
				UHVAG 1.8 NM to RWY 18	RWY 18
CATEGORY	A	B	C	D	
LP MDA	1500-1	419 (500-1)	1500-1½ 419 (500-1½)	NA	
LNAV MDA	1600-1	519 (600-1)	1600-1¾ 519 (600-1¾)	NA	
CIRCLING	1740-1	652 (700-1)	1740-1¾ 652 (700-1¾)	NA	

