


APP CRS	Rwy Idg	4000
031°	TDZE	648
	Apt Elev	658

RNAV (GPS) RWY 3

RUBY (RBY) (PARY)

When local altimeter setting not received, use Galena altimeter setting and increase all MDA 340 feet and all visibilities ¾ SM. DME/DME RNP-0.3 NA. Rwy 3 Straight-in and Circling minimums NA at night. Helicopter visibility reduction below 1 SM NA.	MISSED APPROACH: Climbing right turn to 3800 direct WINUR and hold.
--	--

AWOS-3P 118.25	ANCHORAGE CENTER 127.0 290.2	FAIRBANKS RADIO 122.25	CTAF 122.8
-------------------	---------------------------------	---------------------------	---------------

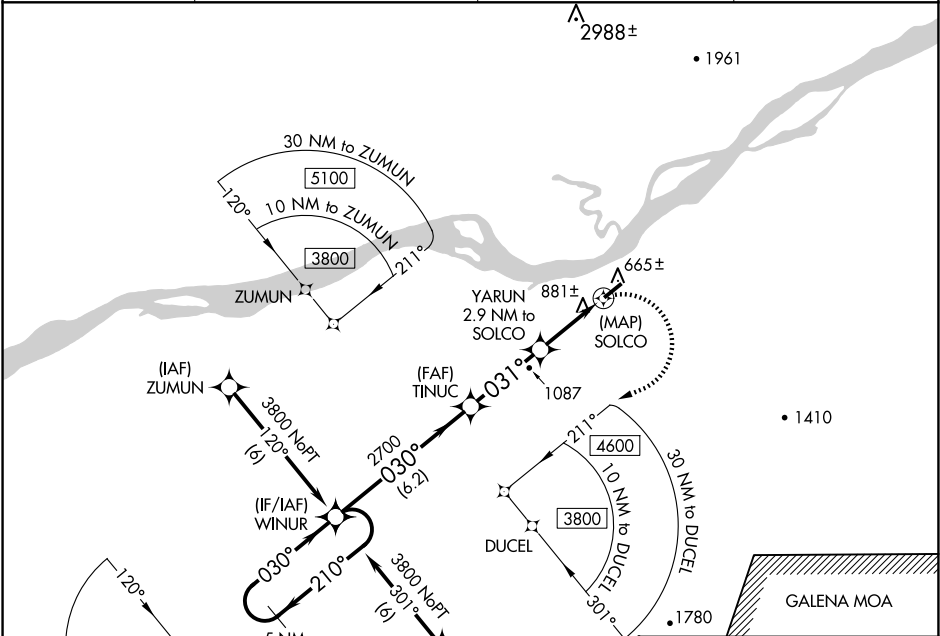

	WINUR	TINUC	YARUN 2.9 NM to SOLCO	SOLCO	WINUR
	5 NM Holding Pattern	Visual Segment - Obstacles.			
	3800	2700	1800		
	210°	030°	031°		
	030°				
	6.2 NM	3.2 NM	2.9 NM	0.1	
CATEGORY	A	B	C	D	
LNVA MDA	1260-1	612 (700-1)	1260-1¾ 612 (700-1¾)	NA	
CIRCLING	1260-1 602 (700-1)	1400-1 742 (800-1)	1400-2¼ 742 (800-2¼)	NA	

REIL Rwy 21

MIRL Rwy 3-21