

APP CRS	Rwy Ldg	3500
088°	TDZE	916
	Apt Elev	916

RNAV (GPS) RWY 9

OCEANA COUNTY (C04)


▼

▲ NA

When local altimeter setting not received, use Fremont altimeter setting and increase all MDAs 80 feet. DME/DME RNP-0.3 NA. Procedure NA at night. Helicopter visibility reduction below 1 SM NA. Circling NA to Rwy 15 and 33.

MISSED APPROACH:
Climbing right turn to 3300
direct WHALL and hold.

AWOS-AV 122.7	GREAT LAKES APP CON★ 119.8 290.35	UNICOM 122.7 (CTAF) 0
------------------	--------------------------------------	--------------------------

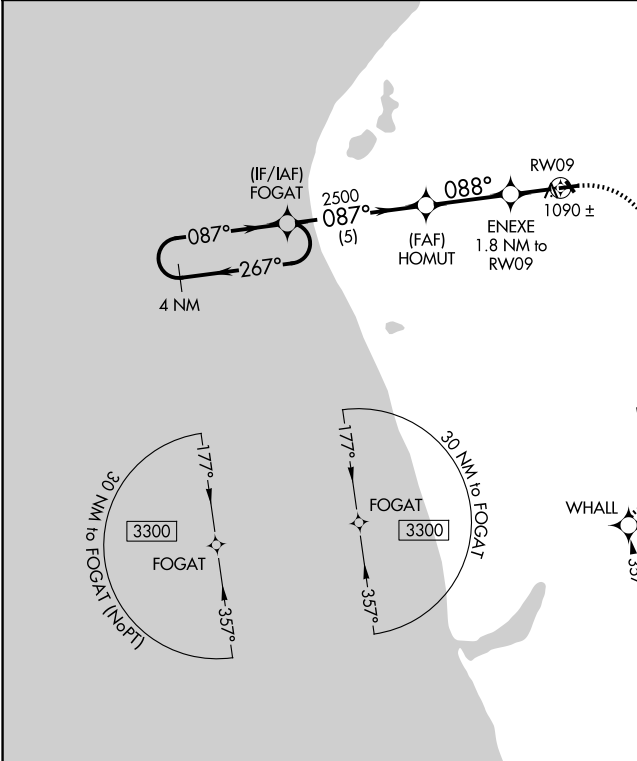

ELEV 916

TDZE 916

The detailed approach path diagram shows the descent from 3300 feet to 1500 feet. It includes the FOGAT, HOMUT, ENEXE, and RW09 waypoints. Key altitudes and distances are marked: 3300 feet for the initial hold, 2500 feet for HOMUT, and 1500 feet for RW09. The chart also shows a 4 NM distance from FOGAT to HOMUT and a 1.8 NM distance from ENEXE to RW09. A 30 NM distance is marked from FOGAT to WHALL. The chart includes a 4 NM holding pattern for FOGAT and a 4 NM distance from WHALL to RW09. The chart also shows a 30 NM distance from FOGAT to WHALL. The chart includes a 4 NM holding pattern for FOGAT and a 4 NM distance from WHALL to RW09. The chart also shows a 30 NM distance from FOGAT to WHALL.

CATEGORY	A	B	C	D
LNAV MDA	1340-1	424 (500-1)	NA	
CIRCLING	1540-1 624 (700-1)	1780-1¼ 864 (900-1¼)	NA	

MIRL Rwy 09-27 0