LOC I-LOW	APP CRS	Rwy Ldg	8400
110.7	012°	TDZE	6649
		Apt Elev	6649

ILS or LOC RWY 1
YELLOWSTONE (WYS)

ADF required. DME required for MUPDE stepdown fix.


T NA -19°C


Inop table does not apply to S-LOC 1 Cat A. For inop MALSR, increase S-ILS 1 all Cats visibility to 2 ¾ mile.

MALSR

MISSED APPROACH: Climb to 9000, then climbing right turn to 10800 direct TARGY LOM and hold, continue climb-in-hold to 10800.
*Missed approach requires minimum climb of 300 feet per NM to 10800.


AWOS-3P	SALT LAKE CENTER	UNICOM
118.1	132.4 338.3	123.0 (CTAF) L

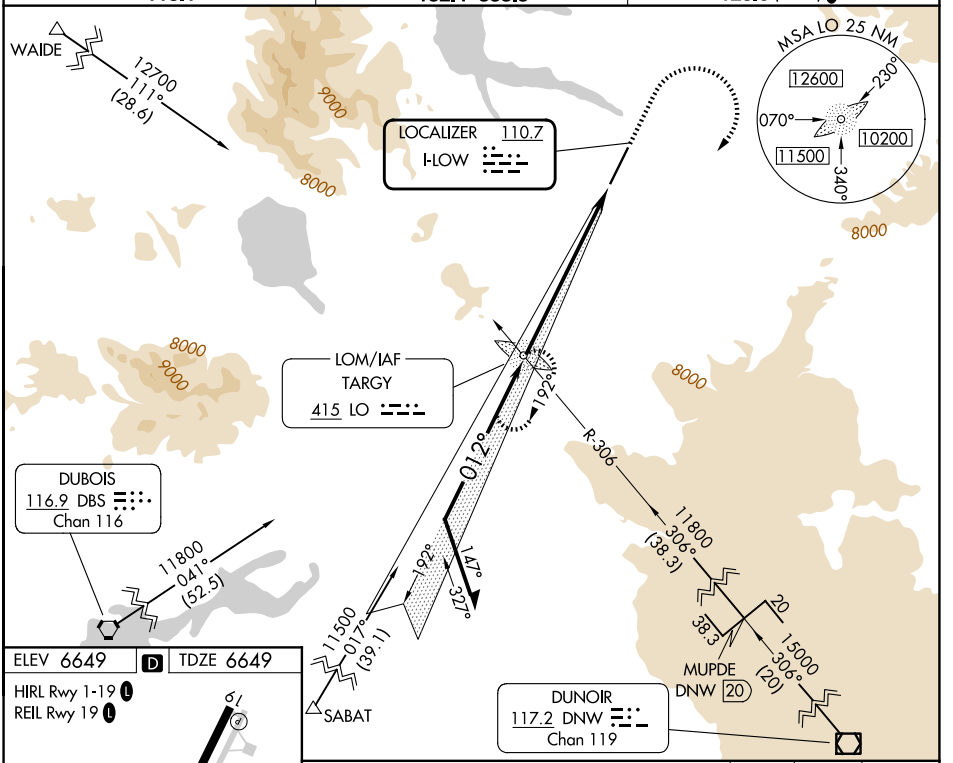

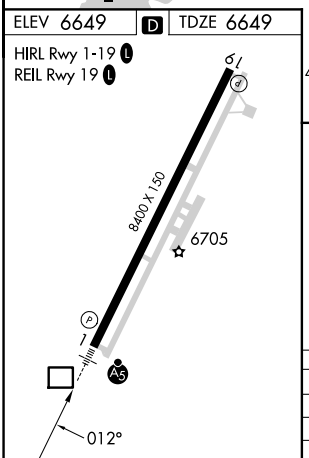

FAF to MAP 6.9 NM

Knots	60	90	120	150	180
Min:Sec	6:54	4:36	3:27	2:46	2:18

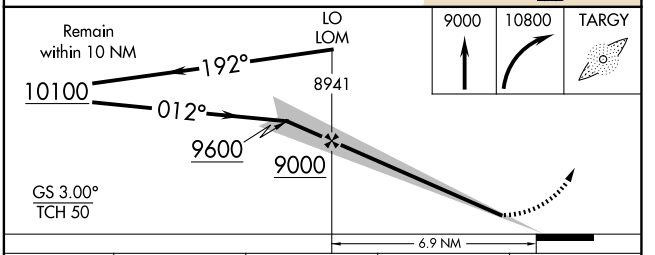

CATEGORY	A	B	C	D
S-ILS 1*	6869-½ 220 (300-½)			
S-ILS 1	7449-2¼ 800 (800-2¼)			
S-LOC 1	7880-1¼ 1231 (1300-1¼)	7880-1 1231 (1300-1)	7880-2½ 1231 (1300-2½)	
CIRCLING	7880-1¼ 1231 (1300-1¼)	7880-1½ 1231 (1300-1½)	7880-3 1231 (1300-3)	8020-3 1371 (1400-3)

NW-1, 01 OCT 2026 to 29 OCT 2026
NW-1, 01 OCT 2026 to 29 OCT 2026