RNAV (GPS) RWY 17


HOBART RGNL (HBR)


WAAS CH **99417** **W17A**	APP CRS **173°**	Rwy Idg **5507** TDZE **1553** Apt Elev **1563**


For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -18°C (0°F) or above 45°C (113°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Altus/Quartz Mountain Rgnl altimeter setting and increase all DA 71 feet and all MDA 80 feet, increase LPV and LNAV/VNAV all Cats, LNAV Cats C and D and Circling Cat C visibility ¼ mile. Baro-VNAV NA when using Altus/Quartz Mountain altimeter setting. VDP NA with Altus/Quartz Mountain altimeter setting.

MISSED APPROACH: Climb to 4000 direct DOMLE and hold.

ASOS	ALTUS APP CON ★	UNICOM
133.325	**125.1 353.7**	**122.8** (CTAF)

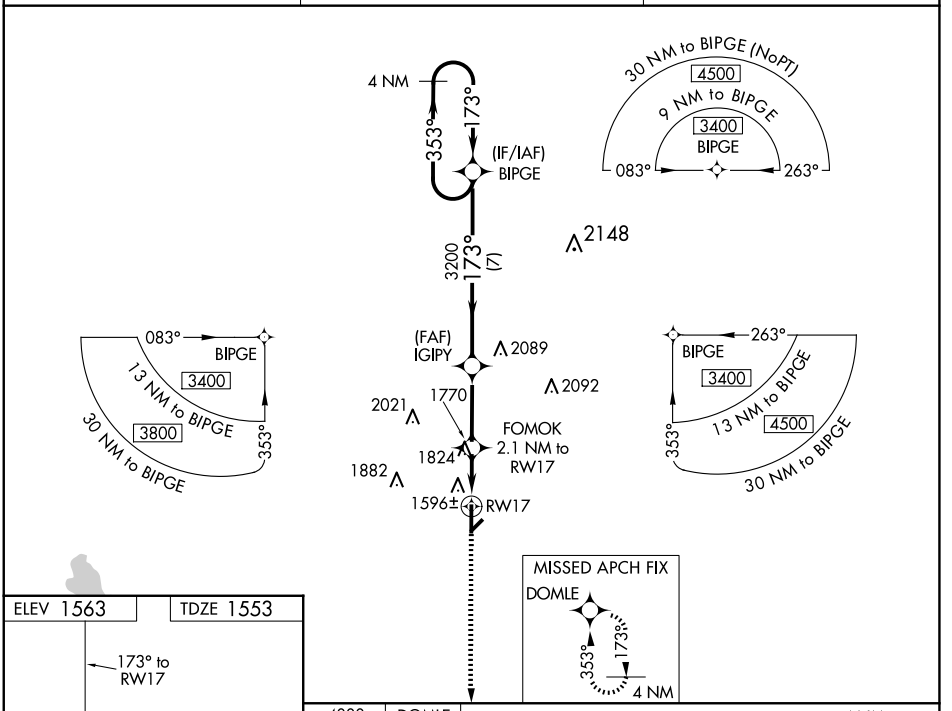

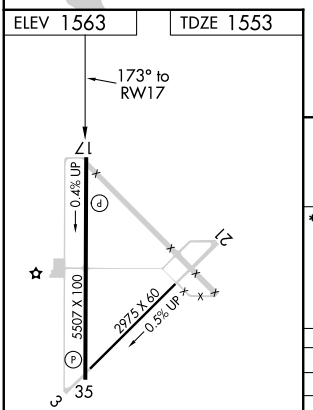

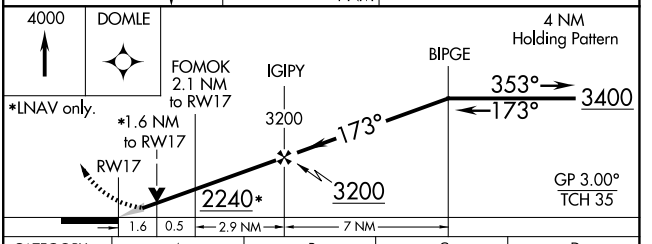

CATEGORY	A	B	C	D
LPV DA	1803-1 250 (300-1)			
LNAV/VNAV DA	1900-1¼ 347 (400-1¼)			
LNAV MDA	2080-1 527 (600-1)		2080-1½ 527 (600-1½)	2080-1¾ 527 (600-1¾)
CIRCLING	2080-1 517 (600-1)		2320-2¼ 757 (800-2¼)	2460-3 897 (900-3)

MIRL Rwy 17-35

SC-1, 01 OCT 2026 to 29 OCT 2026
SC-1, 01 OCT 2026 to 29 OCT 2026