
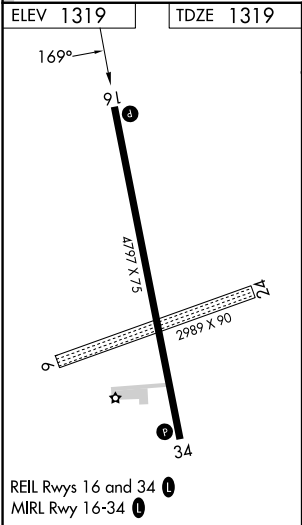


|                                        |                        |                                                                 |
|----------------------------------------|------------------------|-----------------------------------------------------------------|
| WAAS<br>CH <b>40104</b><br><b>W16A</b> | APP CRS<br><b>169°</b> | Rwy Ldg <b>4797</b><br>TDZE <b>1319</b><br>Apt Elev <b>1319</b> |
|----------------------------------------|------------------------|-----------------------------------------------------------------|

RNAV (GPS) RWY 16

ESTHERVILLE MUNI (EST)

|                                                                                                                                                                                                                                                                                                                               |                                           |                                   |                                                       |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------|-----------------------------------|-------------------------------------------------------|
| RNP APCH.<br><div><div>⚠</div><div>Circling NA to Rwy 6 and 24. Baro-VNAV and VDP NA when using Jackson altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 54°C. When local altimeter setting not received, use Jackson altimeter setting and increase all DA/MDA 60 feet.</div></div> |                                           |                                   | MISSED APPROACH: Climb to 3400 direct OHYEQ and hold. |
| ASOS<br><b>121.425</b>                                                                                                                                                                                                                                                                                                        | MINNEAPOLIS CENTER<br><b>127.75 257.7</b> | UNICOM<br><b>122.975 (CTAF) 0</b> |                                                       |

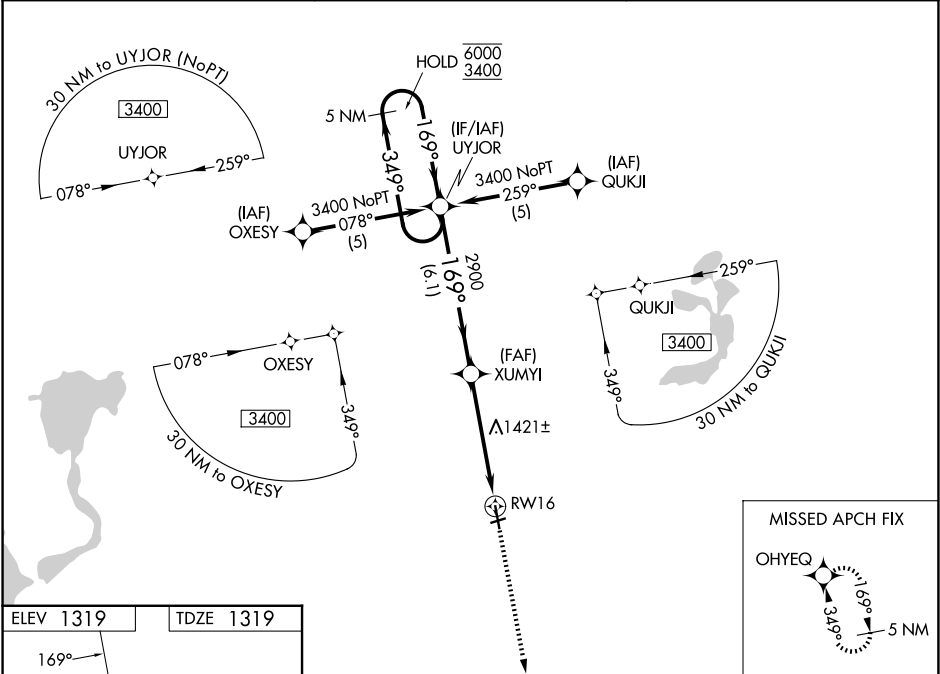

|                                                                  |  |  |  |                         |       |
|------------------------------------------------------------------|--|--|--|-------------------------|-------|
| VGSi and RNAV glidepath not coincident (VGSi Angle 3.00/TCH 39). |  |  |  | 3400                    | OHYEQ |
| 5 NM Holding Pattern UYJOR                                       |  |  |  | ↑                       | ✧     |
| 6000 ← 349°<br>3400 → 169°                                       |  |  |  | * LNAV only             |       |
| GP 3.00°<br>TCH 30                                               |  |  |  | * 1.1 NM to RWY 16      |       |
| 2900                                                             |  |  |  | RWY 16                  |       |
| 6.1 NM                                                           |  |  |  | 3.7 NM                  |       |
| CATEGORY                                                         |  |  |  | 1.1 NM                  |       |
| LPV DA                                                           |  |  |  | A B C D                 |       |
| LNAV/VNAV DA                                                     |  |  |  | 1 569-1 250 (300-1)     |       |
| LNAV MDA                                                         |  |  |  | NA                      |       |
| CIRCLING                                                         |  |  |  | 1 608-1 289 (300-1)     |       |
|                                                                  |  |  |  | NA                      |       |
|                                                                  |  |  |  | 1 720-1 401 (500-1)     |       |
|                                                                  |  |  |  | NA                      |       |
|                                                                  |  |  |  | 1 720-1 1840-1          |       |
|                                                                  |  |  |  | 401 (500-1) 521 (600-1) |       |
|                                                                  |  |  |  | NA                      |       |