
WAAS	APP CRS	Rwy Idg	5001
CH 99302	010°	TDZE	1255
W01A		Apt Elev	1255

RNAV (GPS) RWY 1
NEOSHO HUGH ROBINSON (EOS)

Baro-VNAV NA when using Joplin altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C (2°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. Visibility reduction by helicopters NA. When local altimeter setting not received, use Joplin altimeter setting and increase all DA 87 feet and all MDA 100 feet; increase LPV all Cats visibility ⅛ mile, LNAV/VNAV all Cats visibility ⅜ mile, and LNAV Cat C visibility ¼ mile. When VGSI inop, Straight-in/Circling to Rwy 1 NA at night.

MISSED APPROACH: Climb to 3200 direct TOGAS and hold.

KANSAS CITY CENTER	AUNICOM
128.6 282.325	122.8 (CTAF) L

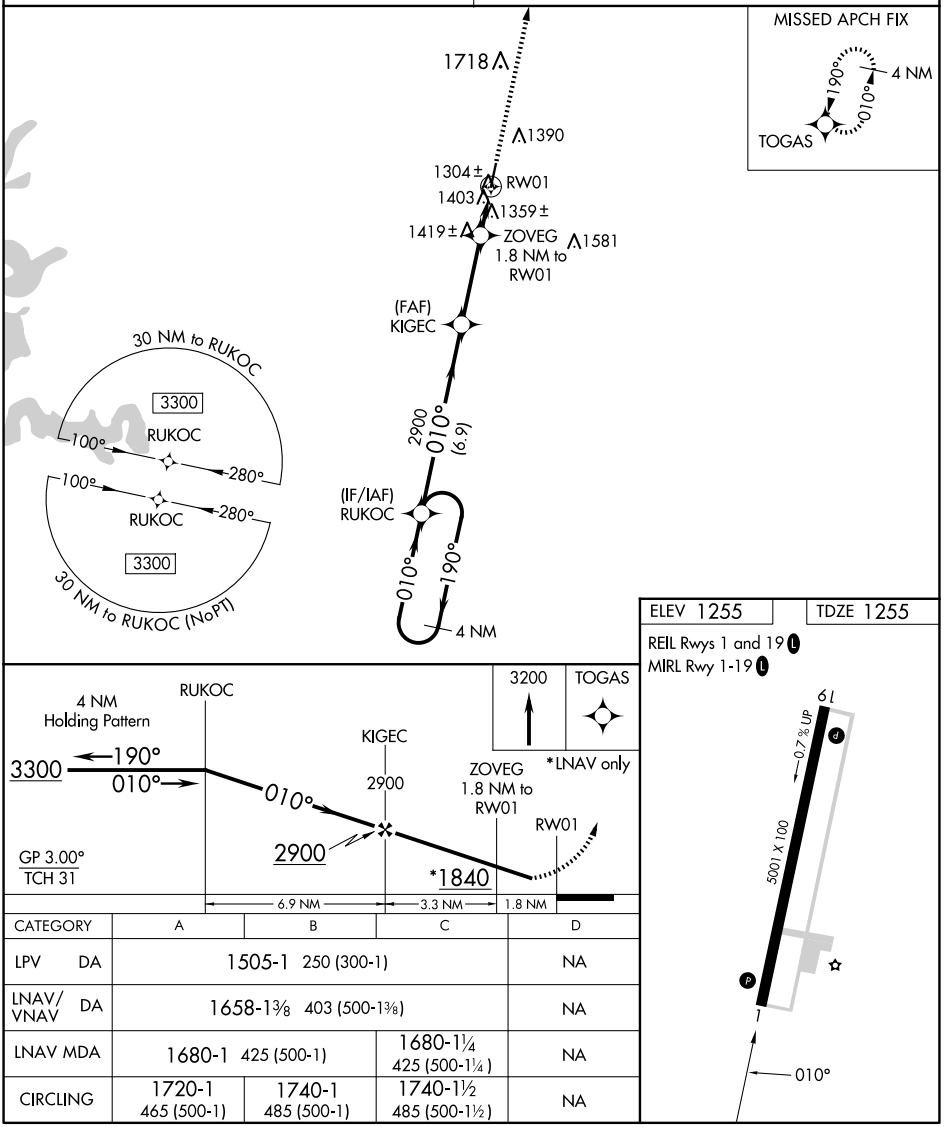

CATEGORY	A	B	C	D
LPV DA	1505-1 250 (300-1)			NA
LNAV/VNAV DA	1658-1⅜ 403 (500-1⅜)			NA
LNAV MDA	1680-1 425 (500-1)		1680-1¼ 425 (500-1¼)	NA
CIRCLING	1720-1 465 (500-1)	1740-1 485 (500-1)	1740-1½ 485 (500-1½)	NA

ELEV 1255 TDZE 1255

REIL Rwys 1 and 19 L

MIRL Rwy 1-19 L

NC-3, 01 OCT 2026 to 29 OCT 2026
NC-3, 01 OCT 2026 to 29 OCT 2026