


APP CRS	Rwy Ldg	5000
121°	TDZE	1086
	Apt Elev	1086


RNAV (GPS) RWY 12
MONROE MUNI (EFT)

RNP APCH-GPS.	MISSED APPROACH: Climb to 3000 direct FALKN and on track 143° to DAVIS and hold.
VDP NA when using FEP altimeter setting. When local altimeter setting not received, use FEP altimeter setting and increase all MDAs 100 feet and LNAV visibility Cat C ¼ SM, LNAV visibility Cat D ½ SM, and Circling visibility Cat C ¼ SM. Rwy 12 helicopter visibility reduction below ¾ SM NA. Circling to Rwy 2-20 NA at night.	

AWOS-3 118.375	ROCKFORD APP CON 126.0 327.0	UNICOM 123.05 (CTAF) 0
-------------------	---------------------------------	---------------------------

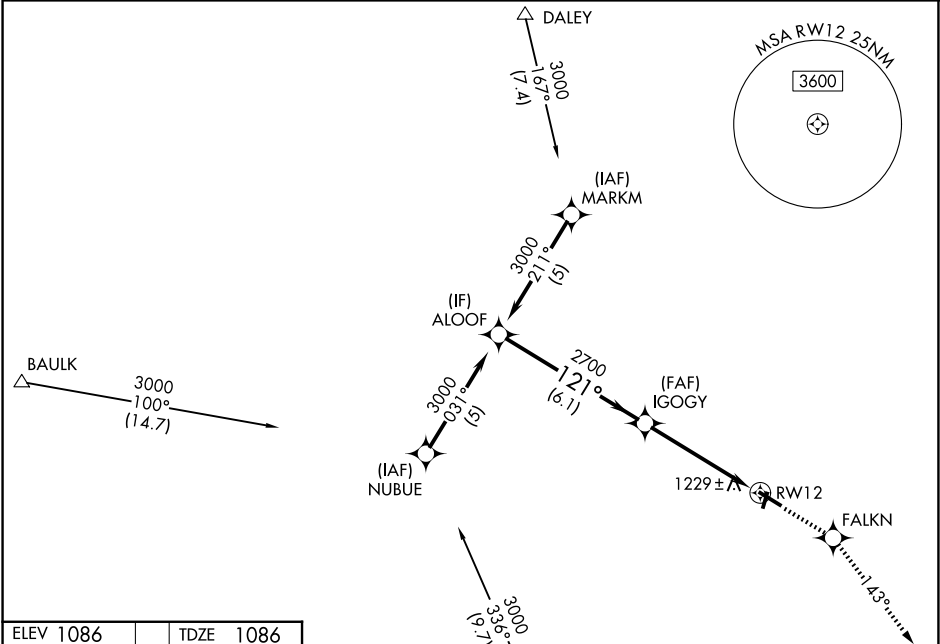

ELEV 1086	TDZE 1086
-----------	-----------

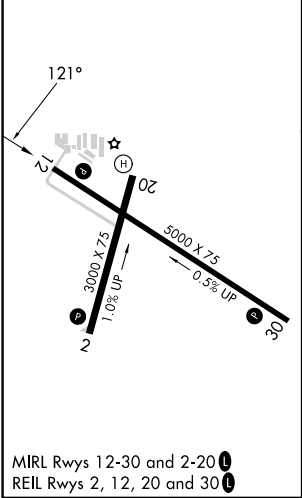

Procedure Turn NA	ALOOF	3000	IGOGY	2700	1.1 NM to RWY 12	3.04 NM TCH 40	3.8 NM	1.1 NM
CATEGORY	A	B	C	D				
LNAV MDA	1480-1	394 (400-1)	1480-1½ 394 (400-1½)	1480-1¼ 394 (400-1¼)				
CIRCLING	1540-1 454 (500-1)	1640-1 554 (600-1)	1640-1½ 554 (600-1½)	1640-2 554 (600-2)				