


WAAS CH 77610 W16A	APP CRS 165°	Rwy Ldg TDZE 885 Apt Elev 885	5003
--	------------------------	---	-------------

RNAV (GPS) RWY 16

PELLA MUNI (PEA)

RNP APCH - GPS.	▼ Rwy 16 helicopter visibility reduction below ¾ SM NA. Baro-VNAV and VDP NA when using OXV altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. When local altimeter setting not received, use OXV altimeter setting: increase LPV DA to 1261 feet; increase LNAV/VNAV DA to 1317 feet; increase all MDAs 40 feet and Circling visibility Cat C ¼ SM.	MISSED APPROACH: Climb to 3000 direct OFKEQ and hold.
-----------------	---	--

AWOS-3 118.875	DES MOINES APP CON 123.9 307.15	UNICOM 122.8 (CTAF)
--------------------------	---	-------------------------------

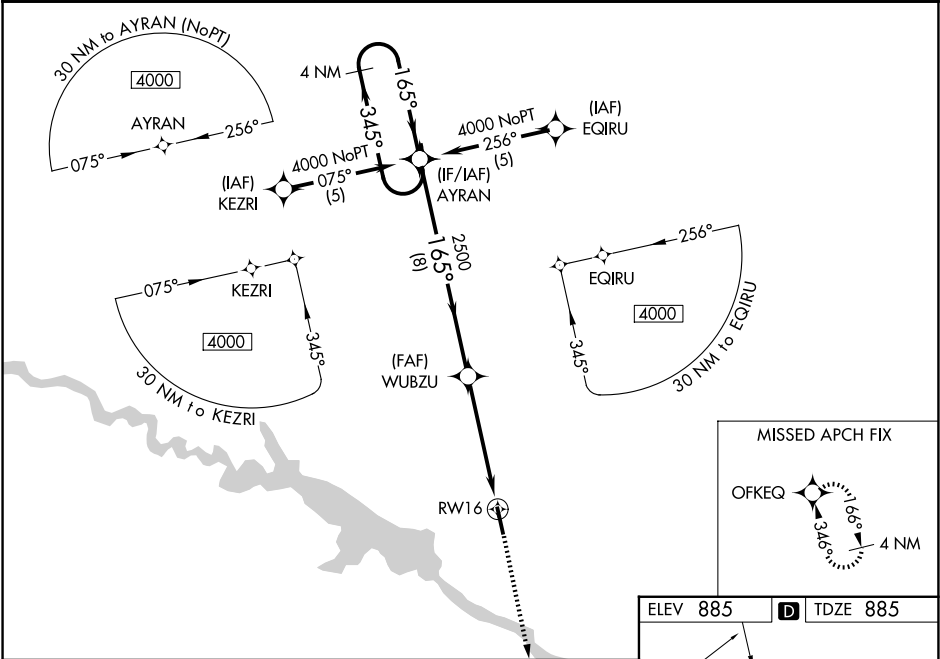

4 NM Holding Pattern		VGSi and RNAV glidepath not coincident (VGSi Angle 3.30/TCH 29).		3000	OFKEQ
4000		AYRAN	WUBZU	1.3 NM to RW16	RW16
GP 3.00° TCH 40		8 NM	3.6 NM	1.3 NM	
CATEGORY	A	B	C	D	
LPV DA	1232-1¼	347 (400-1¼)		NA	
LNAV/VNAV DA	1288-1½	403 (500-1½)		NA	
LNAV MDA	1360-1	475 (500-1)	1360-1⅝ 475 (500-1⅝)	NA	
CIRCLING	1380-1 495 (500-1)	1420-1 535 (600-1)	1480-1½ 595 (600-1½)	NA	

