RNAV (GPS) RWY 8

MACKINAC ISLAND (MCD)

WAAS	APP CRS	Rwy Ldg	3501
CH 63129	082°	TDZE	739
W08A		Apt Elev	741

RNP APCH.

Rwy 8 helicopter visibility reduction below 1 SM NA. When local altimeter setting not received, use Pellston altimeter setting and increase all MDA 60 feet, increase LP and LNAV Cat C visibility ⅛ SM and Circling Cat C visibility ¼ SM. Straight-in and Circling Rwy 8 NA at night.

MISSED APPROACH: Climb to 2500 direct HUVTI and hold.

AWOS-3P	MINNEAPOLIS CENTER	UNICOM	
118.275	134.6 354.05	122.7 (CTAF)	122.8 (L)

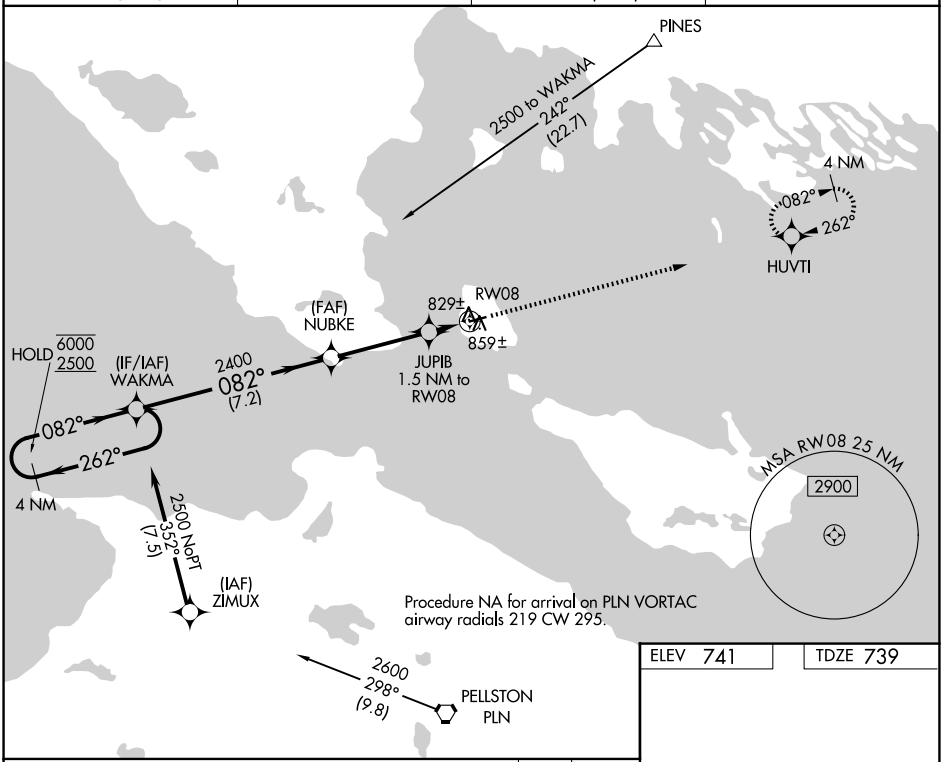

ELEV 741 TDZE 739

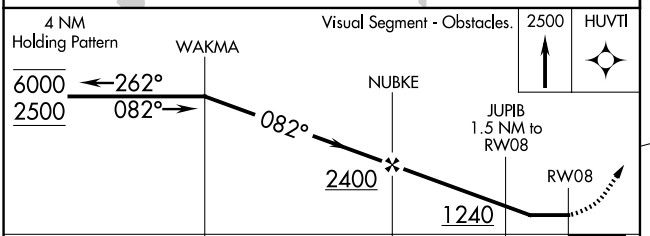

CATEGORY	A	B	C	D
LP MDA	1080-1 341 (400-1)			NA
LNAV MDA	1120-1 381 (400-1)		1120-1⅛ 381 (400-1⅛)	NA
CIRCLING	1320-1 579 (600-1)		1320-1½ 579 (600-1½)	NA



MIRL Rwy 8-26 (L)
REIL Rwys 8 and 26 (L)

EC-1, 01 OCT 2026 to 29 OCT 2026
EC-1, 01 OCT 2026 to 29 OCT 2026