WAAS	APP CRS	Rwy Ldg 8001
CH 53708	130°	TDZE 18
W13A		Apt Elev 19

RNAV (GPS) RWY 13


CAMERON COUNTY (PIL)

RNP APCH.


Baro-VNAV NA when using Brownsville altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. VDP NA when using Brownsville altimeter setting. When local altimeter setting not received, use Brownsville altimeter setting and increase all DA 38 feet and all MDA 40 feet, increase LPV all Cats, LNAV Cat C, and Circling Cat C visibility ¼ mile. Circling Rwys 3, 8, 17, 21, 26, 35 NA at night.

MISSED APPROACH: Climb to 3000 direct COKAX and via 185° track to CHICO and hold.


ASOS	VALLEY APP CON	CLNC DEL	UNICOM
118.525	119.5 257.6	119.2	122.8 (CTAF)

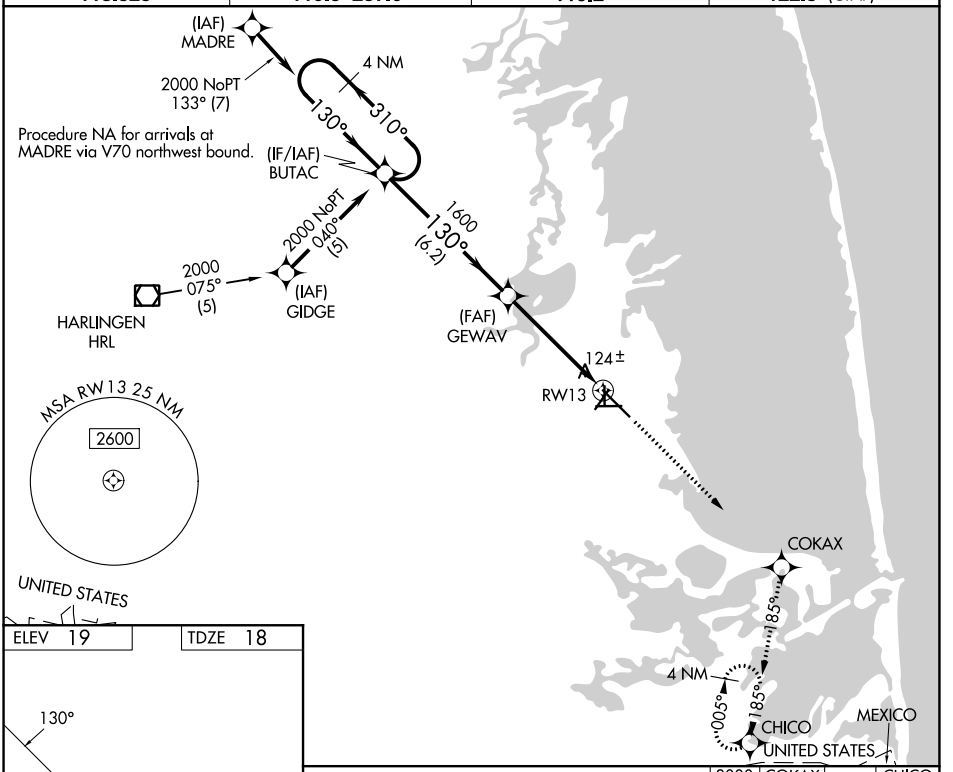

ELEV 19	TDZE 18



REIL Rwys 13 and 31
MIRL Rwy 13-31

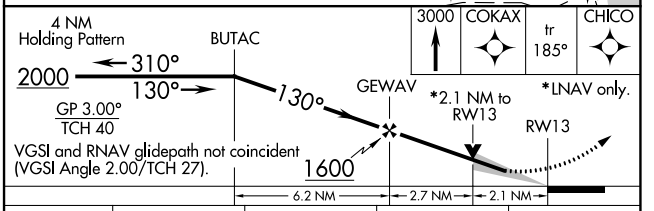

CATEGORY	A	B	C	D
LPV DA	376-1¼ 358 (400-1¼)			NA
LNAV/VNAV DA	424-1½ 406 (500-1½)			NA
LNAV MDA	480-1 462 (500-1)		480-1¼ 462 (500-1¼)	NA
CIRCLING	540-1 521 (600-1)	620-1 601 (700-1)	840-2½ 821 (900-2½)	NA

SC-3, 01 OCT 2026 to 29 OCT 2026
SC-3, 01 OCT 2026 to 29 OCT 2026