RNAV (GPS) RWY 12

ULYSSES (ULS)


WAAS	APP CRS	Rwy Ldg	4600
CH 99539	124°	TDZE	3071
W12A		Apt Elev	3071


RNP APCH - GPS.

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -21°C or above 54°C. When local altimeter setting not received, use Garden City altimeter setting: increase LPV DA to 3431 feet, LNAV/VNAV DA to 3563 feet and visibility ⅛ SM; increase all MDAs 120 Feet and visibility Cat C ¼ SM. Baro-VNAV and VDP NA when using Garden City altimeter setting.


MISSED APPROACH: Climb to 5400 direct VUVKY and hold.

AWOS-3PT	KANSAS CITY CENTER	UNICOM
118.95	125.2 285.425	122.8 (CTAF) L

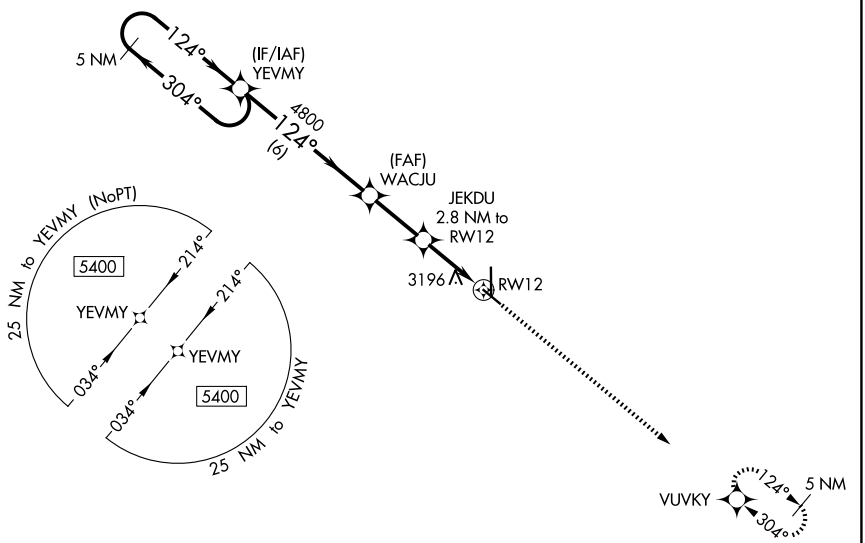

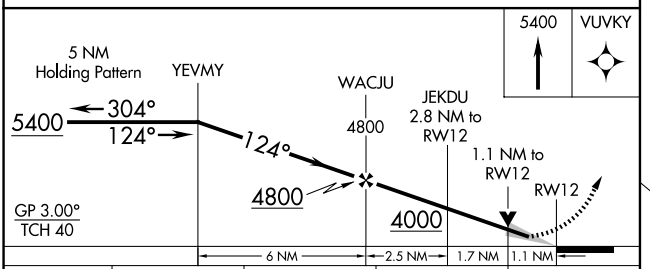

CATEGORY	A	B	C	D
LPV DA	3321-1 250 (300-1)			NA
LNAV/VNAV DA	3453-1¼ 382 (400-1¼)			NA
LNAV MDA	3460-1 389 (400-1)		3460-1⅛ 389 (400-1⅛)	NA
CIRCLING	3740-1 669 (700-1)		3900-2½ 829 (900-2½)	NA

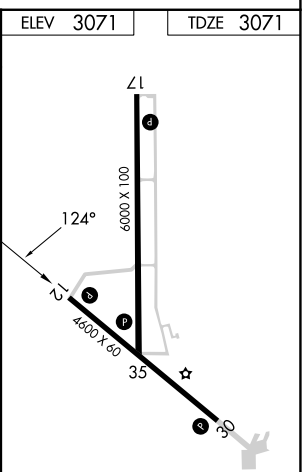

REIL Rwys 17 and 35 L
MIRL Rwys 12-30 and 17-35 L

NC-2, 01 OCT 2026 to 29 OCT 2026
NC-2, 01 OCT 2026 to 29 OCT 2026