RNAV (GPS) RWY 13

HALLOCK MUNI (HCO)


WAAS CH **40333** **W13A**	APP CRS **135°**	Rwy Ldg **4007** TDZE **820** Apt Elev **820**


RNP APCH-GPS.


Baro-VNAV NA when using Grafton altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. When local altimeter setting not received, use Grafton altimeter setting and increase LPV DA to 1082 feet; increase LNAV/VNAV DA to 1161 feet; increase all MDAs 80 feet and LNAV visibility Cat C ¼ SM, and Circling visibility Cat C ¼ SM.

MISSED APPROACH: Climb to 2800 direct HOGEB and hold.

AWOS-3	MINNEAPOLIS CENTER	UNICOM
126.475	**132.15 269.6**	**122.8** (CTAF) L

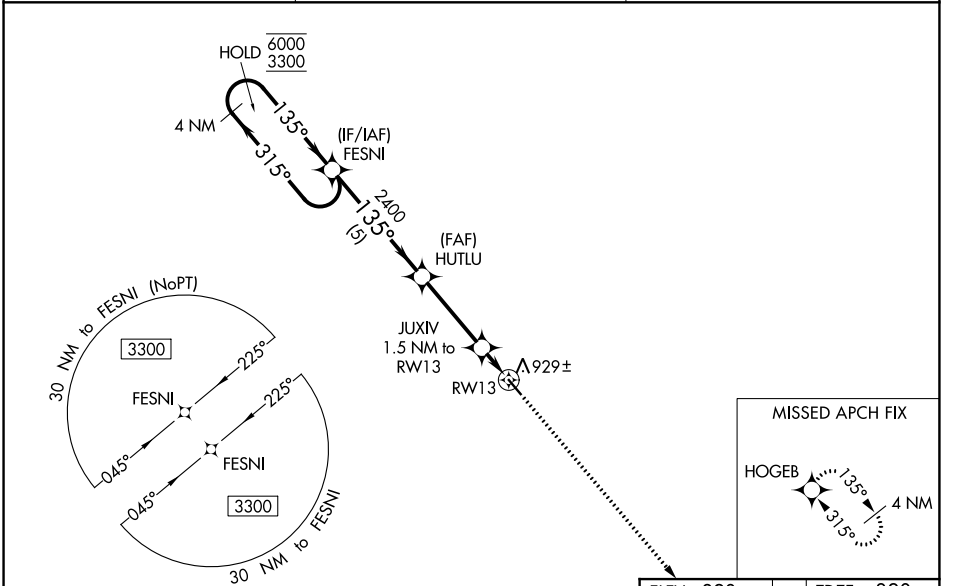

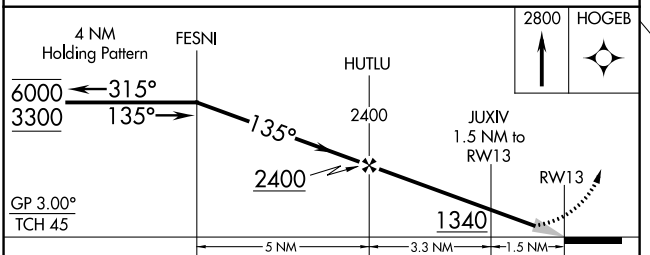



CATEGORY	A	B	C	D
LPV DA	1020-1 200 (200-1)			NA
LNAV/VNAV DA	1099-1 279 (300-1)			NA
LNAV MDA	1180-1 360 (400-1)			NA
CIRCLING	1380-1 560 (600-1)		1380-1½ 560 (600-1½)	NA

REIL Rwys 13 and 31 L
MIRL Rwy 13-31 L

NC-1, 01 OCT 2026 to 29 OCT 2026
NC-1, 01 OCT 2026 to 29 OCT 2026