

WAAS CH 99605 W07A	APP CRS 071°	Rwy Ldg TDZE Apt Elev	5008 6 7
--	------------------------	-----------------------------	-------------------------------------

RNAV (GPS) RWY 7

THE FLORIDA KEYS MARATHON INTL (MTH)


RNP APCH-GPS.

▼

Rwy 7 helicopter visibility reduction below 1 SM NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below 12°C or above 54°C. Baro-VNAV NA when using EYW altimeter setting. Procedure NA at night. When local altimeter setting not received, use EYW altimeter setting: increase LPV DA to 482 feet and all visibilities ¼ SM, LNAV/VNAV DA to 474 feet and all visibilities ⅜ SM, increase all MDAs 100 feet and LNAV Cat C/D visibility ¼ SM and Circling Cat C/D visibility ½ SM.

MISSED APPROACH: Climb to 2000 direct LOGEY and hold.

ASOS 135.525	MIAMI CENTER 133.5 306.9	UNICOM 122.975 (CTAF) 0
------------------------	------------------------------------	-----------------------------------

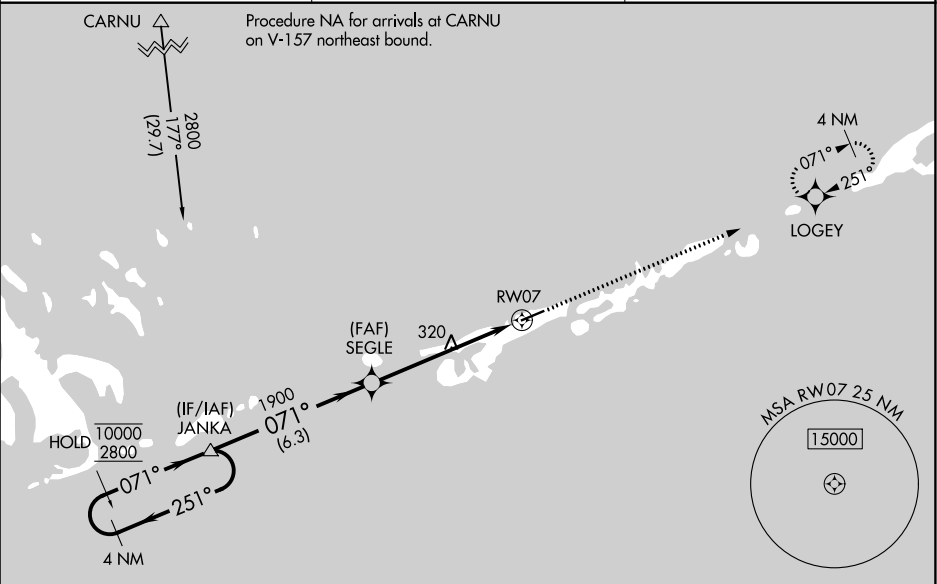

4 NM Holding Pattern

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 25).

2000 LOGEY

JANKA

SEGLE

RW07

GP 3.00° TCH 40

6.3 NM

5.8 NM

5008 X 100

62

REIL Rwy 7 0

MIRL Rwy 7-25 0

CATEGORY	A	B	C	D
LPV DA		389-1⅛	383 (400-1⅛)	
LNAV/VNAV DA		381-1	375 (400-1)	
LNAV MDA	600-1	594 (600-1)	600-1¾	594 (600-1¾)
CIRCLING	600-1	593 (600-1)	620-1¾ 613 (700-1¾)	660-2 653 (700-2)