

WAAS CH 78215 W13A	APP CRS 134°	Rwy Ldg 4012 TDZE 837 Apt Elev 841
--	------------------------	---

RNAV (GPS) RWY 13

OSKALOOSA MUNI (00A)

RNP APCH - GPS.


▼

⚠

When local altimeter setting not received, use OTM altimeter setting: increase LPV DA to 1212 feet; increase LNAV/VNAV DA to 1238 feet; increase all MDAs 20 feet. Baro-VNAV and VDP NA when using OTM altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C.

MISSED APPROACH: Climb to 3000 direct HONPA and hold.

AWOS-3 118.625	CHICAGO CENTER 118.15 335.575	UNICOM 122.8 (CTAF) 0
--------------------------	---	---------------------------------

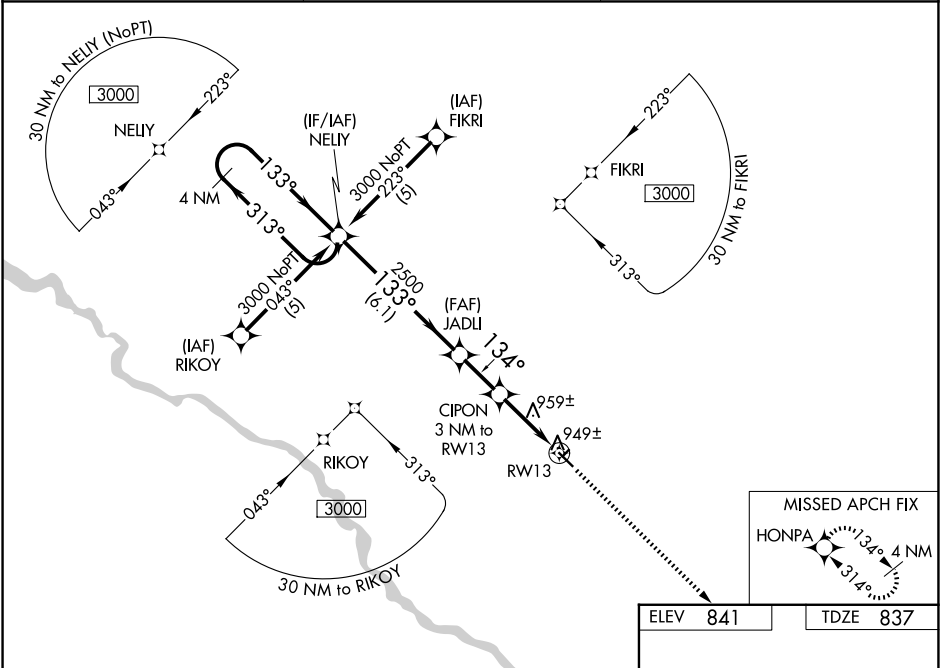

4 NM Holding Pattern		VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 22').		3000	HONPA
GP 3.00° TCH 40'		CIPON 3 NM to RWY 13		1.1 NM to RWY 13	
		RWY 13			
CATEGORY	A	B	C	D	
LPV DA	1193-1¼	356 (400-1¼)		NA	
LNAV/VNAV DA	1219-1¼	382 (400-1¼)		NA	
LNAV MDA	1220-1	383 (400-1)	1220-1⅛ 383 (400-1⅛)	NA	
CIRCLING	1260-1 419 (500-1)	1300-1 459 (500-1)	1300-1½ 459 (500-1½)	NA	

ELEV 841 TDZE 837

REIL Rwy 13 and 31 0
MIRL Rwy 13-31 0