

WAAS CH 78047 W17A	APP CRS 173°	Rwy Ldg 4001 TDZE 1551 Apt Elev 1551
--	------------------------	---

RNAV (GPS) RWY 17
WATONGA RGNL (JWG)


RNP APCH - GPS.



For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -18°C or above 54°C. Baro-VNAV and VDP NA when using CLK altimeter setting. When local altimeter setting not received, use CLK altimeter setting and increase LPV DA to 1887 feet and all visibilities ½ SM; increase LNAV/VNAV DA to 2086 feet and all visibilities ½ SM; increase all MDAs 100 feet and LNAV visibility Cat C ½ SM and Circling visibility Cat C ½ SM.


MISSED APPROACH: Climb to 2100 then climbing left turn to 4000 direct ASEHU and hold.

AWOS-3 134.175	VANCE APP CON ★ 126.75 346.325	UNICOM 122.8 (CTAF) L
--------------------------	--	---------------------------------

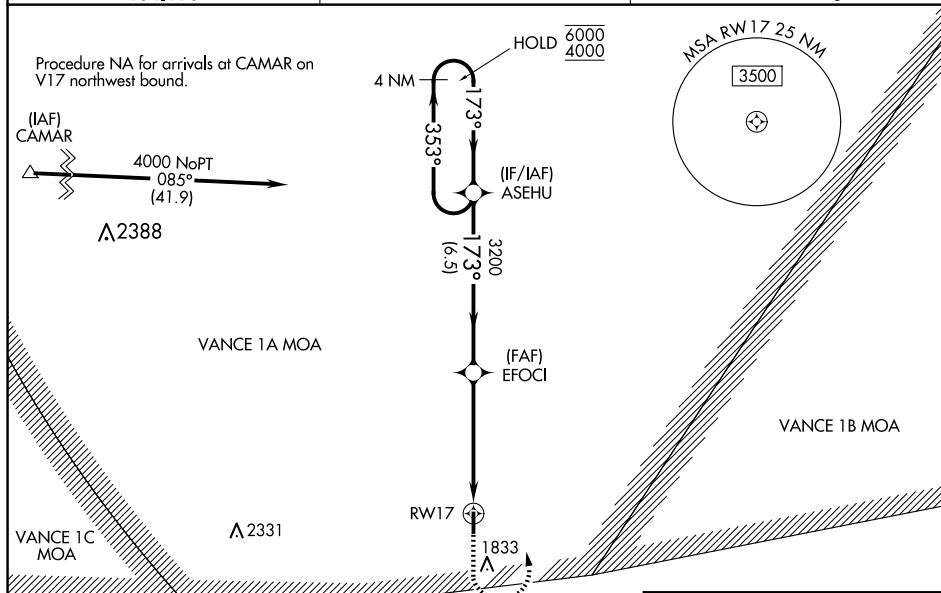


Procedure NA for arrivals at ODINS on V17 southeast bound.

4000 to ASEHU
348° (21.7) 

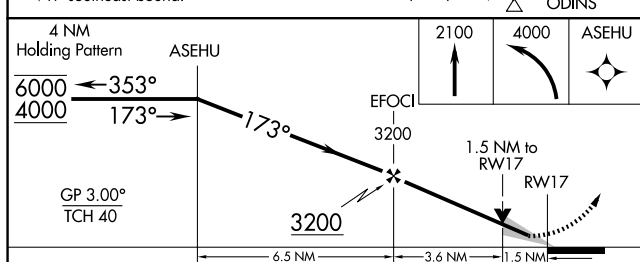

CATEGORY		A	B	C	D
LPV	DA	1801- ³ / ₄	250 (300- ³ / ₄)		NA
INAV/ VNAV	DA	2000-1 ³ / ₈	449 (500-1 ³ / ₈)		NA
INAV	MDA	2020-1	469 (500-1)	2020-1 ³ / ₈ 469 (500-1 ³ / ₈)	NA
CIRCLING		2040-1 489 (500-1)	2140-1 589 (600-1)	2140-1 ¹ / ₂ 589 (600-1 ¹ / ₂)	NA

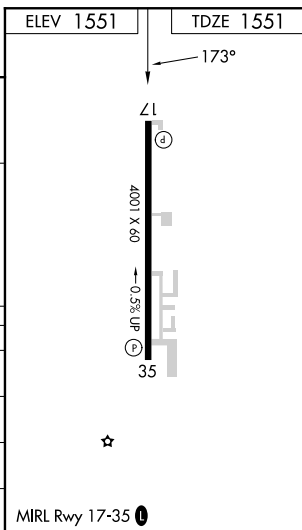

RNAV (GPS) RWY 17