


WAAS CH 77622 W15A	APP CRS 148°	Rwy Ldg TDZE Apt Elev 4000 1061 1062
--	------------------------	--

RNAV (GPS) RWY 15

HUTCHINSON MUNI/BUTLER FLD (HCD)

RNP APCH - GPS.			MISSED APPROACH: Climb to 3000 direct WOBGI and hold.
For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 54°C. Baro-VNAV and VDP NA when using GYL altimeter setting. When local altimeter setting not received, use GYL altimeter setting and increase LPV DA to 1353 feet and all visibilities ½ SM; increase LNAV/VNAV DA to 1370 feet; increase all MDAs 60 feet and LNAV visibility Cat C ½ SM.			
AWOS-3 118.525	MINNEAPOLIS CENTER 127.1 290.2	GCO 121.725	UNICOM 122.8 (CTAF) 0

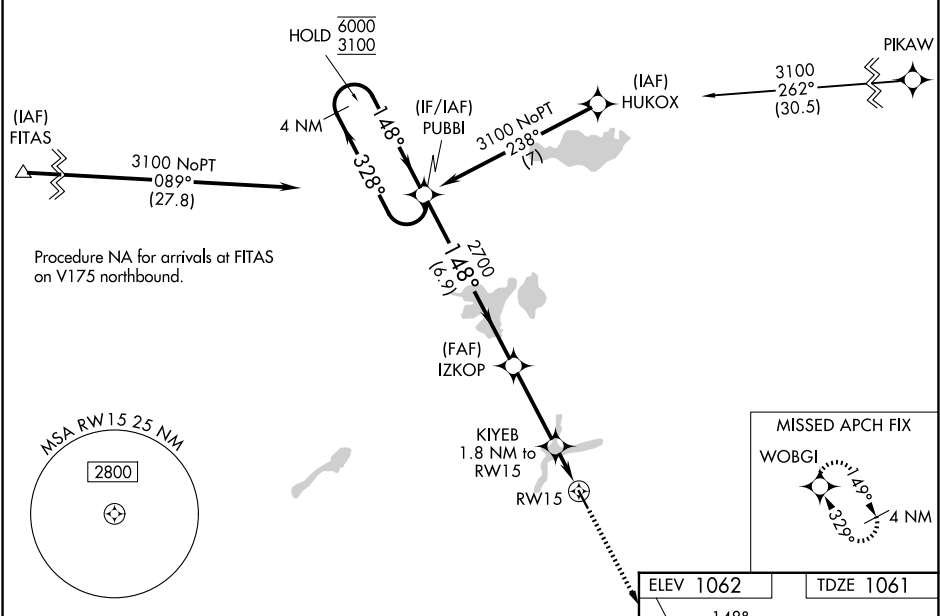

4 NM

Holding Pattern

PUBBI

IZKOP

KIYEB

1.8 NM to RW15

1 NM to RW15

RW15

3000

WOBGI

6000

3100

←328°

→148°

GP 3.00°

TCH 40

2700

1640

148°

6.9 NM

3.2 NM

0.8

1 NM

CATEGORY	A	B	C	D
LPV DA	1311-¾ 250 (300-¾)			NA
LNAV/VNAV DA	1328-⅞ 267 (300-⅞)			NA
LNAV MDA	1420-1 359 (400-1)			NA
CIRCLING	1580-1 518 (600-1)	1600-1 538 (600-1)	1740-2 678 (700-2)	NA

148°

33

4000 X 75

MIRL Rwy 15-33

REIL Rwy 15 and 33