

WAAS CH 93804 W18A	APP CRS 176°	Rwy Ldg TDZE Apt Elev	5201 1277 1277
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 18

WELLINGTON MUNI (E/GT)


RNP APCH - GPS.

⚠

Baro-VNAV and VDP NA when using ICT altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 54°C. When local altimeter setting not received, use ICT altimeter setting: increase LPV DA to 1530 feet; increase LNAV/VNAV DA to 1775 feet; increase all MDAs 60 feet and LNAV Cats C/D visibility 1⁄8 SM and Circling Cat C/D visibility 1⁄4 SM.

MISSED APPROACH: Climb to 3000 direct GOLMN and hold.

AWOS-3P 118.875	WICHITA APP CON 134.85	UNICOM 122.8 (CTAF) 0
---------------------------	----------------------------------	---------------------------------

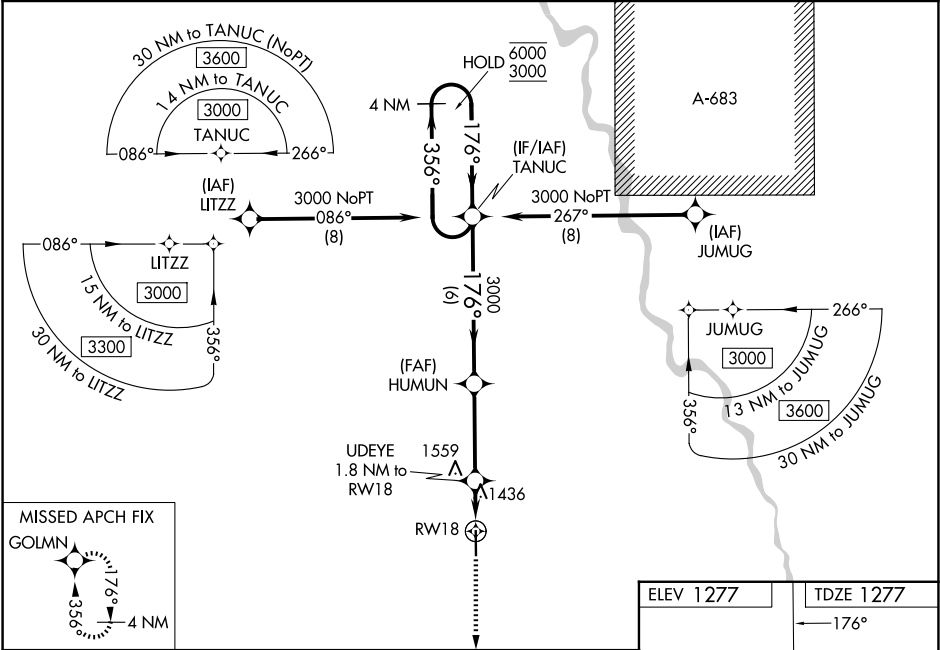

4 NM Holding Pattern	TANUC	HUMUN	UDEYE 1.8 NM to RW18	3000	GOLMN
6000	356°	176°	3000	1900	1.2 NM to RW18
3000	176°	3000	3000	1900	RW18
GP 3.00°					
TCH 42					
	6 NM	3.5 NM	0.6 NM	1.2 NM	
CATEGORY	A	B	C	D	
LPV DA		1477-1	200 (200-1)		
LNAV/VNAV DA		1722-13⁄8	445 (500-13⁄8)		
LNAV MDA	1700-1	423 (500-1)	1700-1¼	423 (500-1¼)	
CIRCLING	1760-1	483 (500-1)	2040-2¼	2140-2¾	2340-2¾

