

WAAS CH 78335 W14A	APP CRS 143°	Rwy Ldg 4400 TDZE 1798 Apt Elev 1800
--	------------------------	---

RNAV (GPS) RWY 14

SMITH CENTER MUNI (K82)


RNP APCH - GPS.

⚠

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -18°C or above 54°C. Baro-VNAV and VDP NA when using CNK altimeter setting. When local altimeter setting not received, use CNK altimeter setting: increase LPV DA to 2172 feet; increase LNAV/VNAV DA to 2250 and all visibilities ¾ SM; increase all MDAs 180 feet and Circling all Cats visibility ½ SM.

MISSED APPROACH: Climb to 3700 direct JUXUL and hold.

AWOS-3PT 118.45	MINNEAPOLIS CENTER 119.4 278.8	UNICOM 122.8 (CTAF) 0
---------------------------	--	---------------------------------

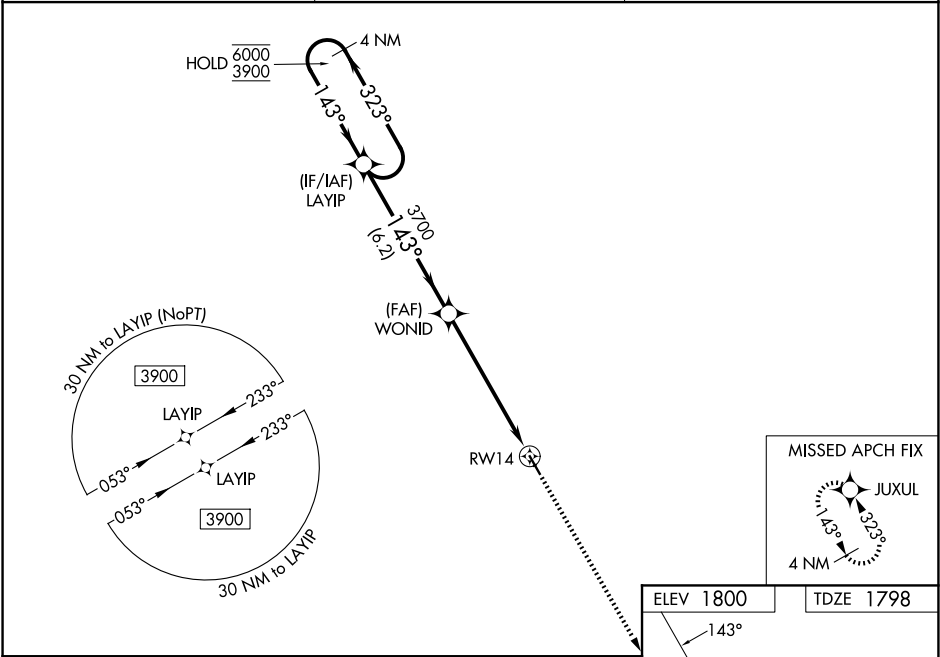

4 NM Holding Pattern


LAYIP

3700 JUXUL

GP 3.00° TCH 40

6.2 NM 4.3 NM 1.6 NM

CATEGORY	A	B	C	D
LPV DA	1998-1	200 (200-1)	NA	
LNAV/VNAV DA	2076-1	278 (300-1)	NA	
LNAV MDA	2320-1	522 (600-1)	NA	
CIRCLING	2480-1 680 (700-1)	2580-1 780 (800-1)	NA	

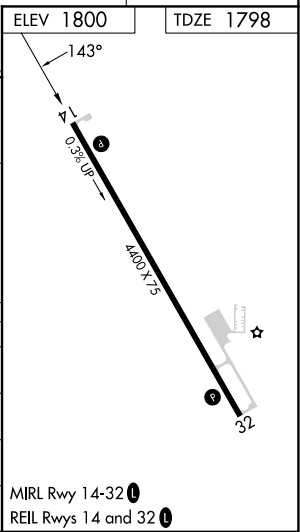

NC-2, 01 OCT 2026 to 29 OCT 2026

NC-2, 01 OCT 2026 to 29 OCT 2026