
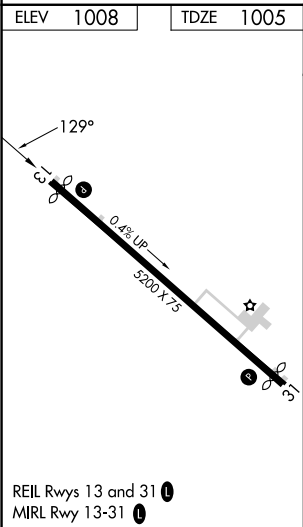


WAAS CH 58107 W13A	APP CRS 129°	Rwy Ldg TDZE Apt Elev	5000 1005 1008
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 13

GRINNELL RGNL (GGI)

RNP APCH - GPS. When local altimeter setting not received, use TNU altimeter setting: increase LPV DA to 1324 feet; increase LNAV/VNAV DA 1455 feet; increase all MDAs 40 feet. Baro-VNAV NA when using TNU altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 54°C. Rwy 13 helicopter visibility reduction below 1 SM NA.		MISSED APPROACH: Climb to 3000 direct PICRA and hold.
AWOS-3 120.725	CHICAGO CENTER 127.05 282.35	UNICOM 122.8 (CTAF) 0

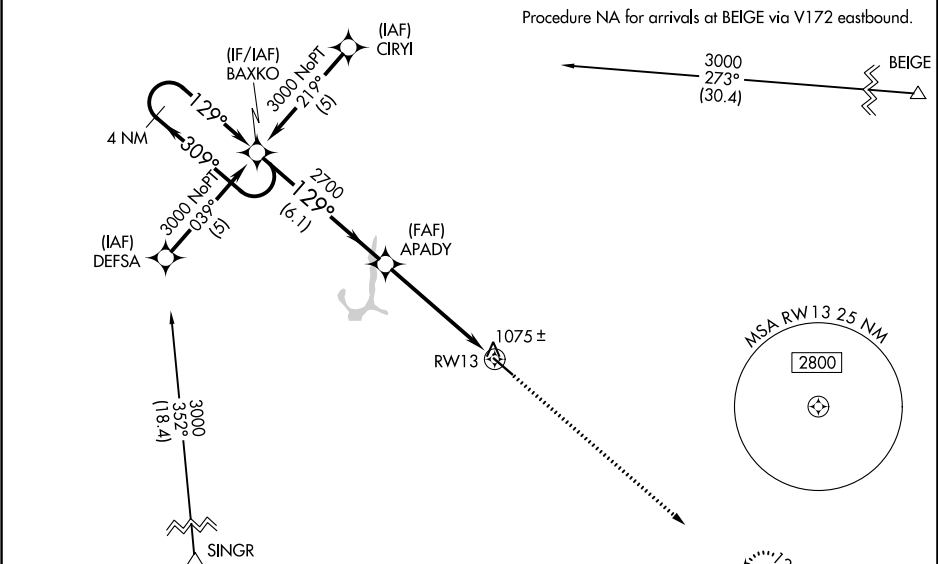

4 NM Holding Pattern		BAXKO	3000	PICRA
309°		129°	129°	
GP 3.00°		APADY	2700	
TCH 34		6.1 NM	5.2 NM	RW13
CATEGORY	A	B	C	D
LPV DA	1284-1 279 (300-1)			NA
LNAV/VNAV DA	1415-1½ 410 (500-1½)			NA
LNAV MDA	1480-1	475 (500-1)	1480-1⅜ 475 (500-1⅜)	NA
CIRCLING	1620-1	612 (700-1)	1620-1¾ 612 (700-1¾)	NA