WAAS CH 69419 W13A | APP CRS 136° | Rwy Ldg 4002 | TDZE 1140 | Apt Elev 1140

RNAV (GPS) RWY 13


LITCHFIELD MUNI (LJF)


RNP APCH - GPS.

Baro-VNAV NA when using Hutchinson altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 54° C. Visibility reduction by helicopters NA. When local altimeter setting not received, use Hutchinson altimeter setting: increase LPV DA to 1436 feet; increase LNAV/VNAV DA to 1980 feet and visibility all Cats ¼ SM; increase all MDA 60 feet and Circling Cat C visibility ¼ SM. VDP NA with Hutchinson altimeter setting.


MISSED APPROACH: Climb to 2800 direct ANIML and hold.

AWOS-3	MINNEAPOLIS CENTER	CTAF
119.65	125.5 323.1	122.9 L

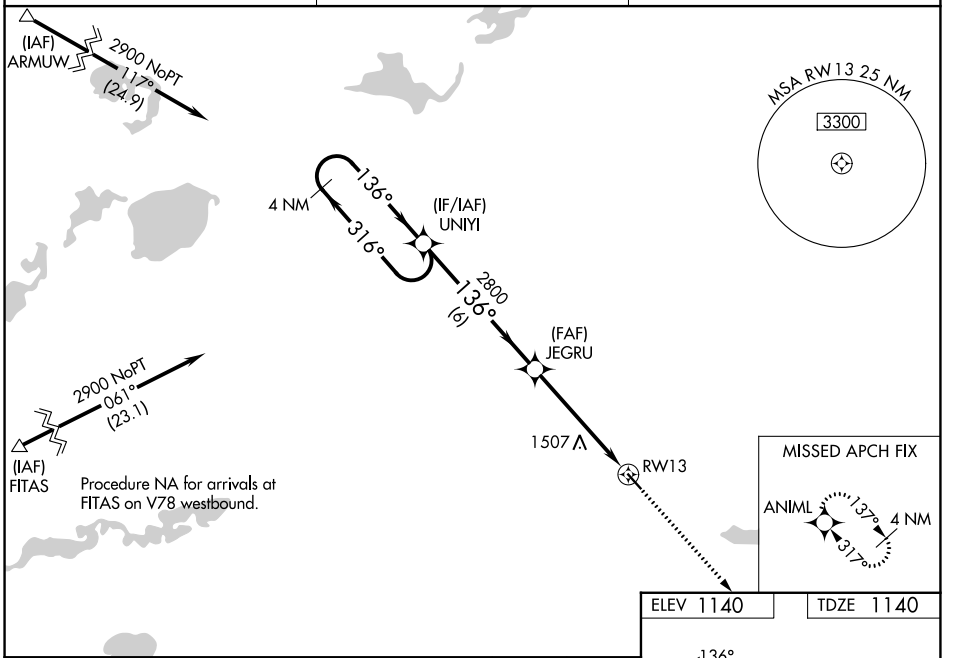

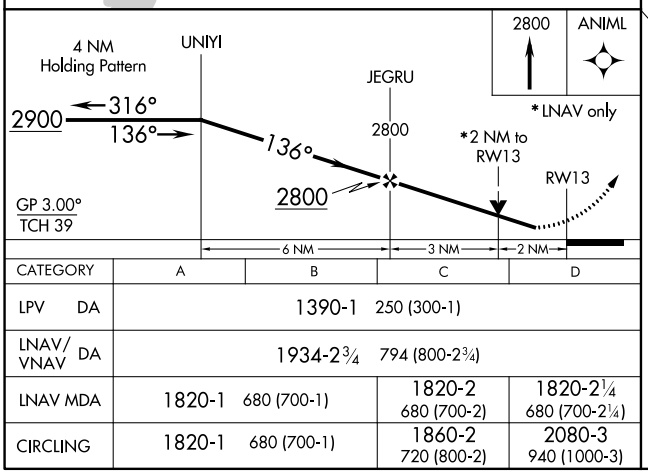

CATEGORY	A	B	C	D
LPV DA	1390-1 250 (300-1)			
LNAV/VNAV DA	1934-2¾ 794 (800-2¾)			
LNAV MDA	1820-1 680 (700-1)		1820-2 680 (700-2)	1820-2¼ 680 (700-2¼)
CIRCLING	1820-1 680 (700-1)		1860-2 720 (800-2)	2080-3 940 (1000-3)

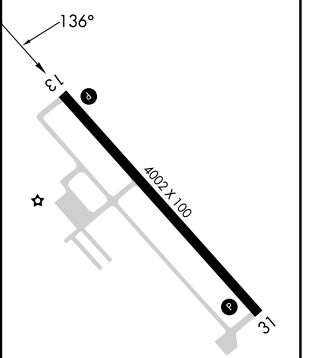

REIL Rwys 13 and 31 L
MIRL Rwy 13-31 L

NC-1, 01 OCT 2026 to 29 OCT 2026
NC-1, 01 OCT 2026 to 29 OCT 2026