

WAAS CH 70631 W31A	APP CRS 313°	Rwy Ldg 4198 TDZE 1606 Apt Elev 1607
--	------------------------	--


RNAV (GPS) RWY 31
CARRINGTON MUNI (46D)

T For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -18°C (0°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. Helicopter visibility reduction below ¾ SM NA.


A Circling RWY 13 NA at night. VDP and Baro-VNAV NA with Jamestown altimeter setting. When local altimeter setting not received, use Jamestown altimeter setting and increase all DA and MDA 100 feet, increase LPV all Cats visibility ½ mile; LNAV/VNAV all Cats visibility ¾ mile; LNAV Cat C visibility ¼ mile and Circling Cat C visibility ¾ mile.

MISSED APPROACH: Climb to 2300 then climbing left turn to 3200 direct CECYA and hold.

AWOS-3 118.575	MINNEAPOLIS CENTER 124.2 270.3	CTAF 122.9 0
--------------------------	--	------------------------

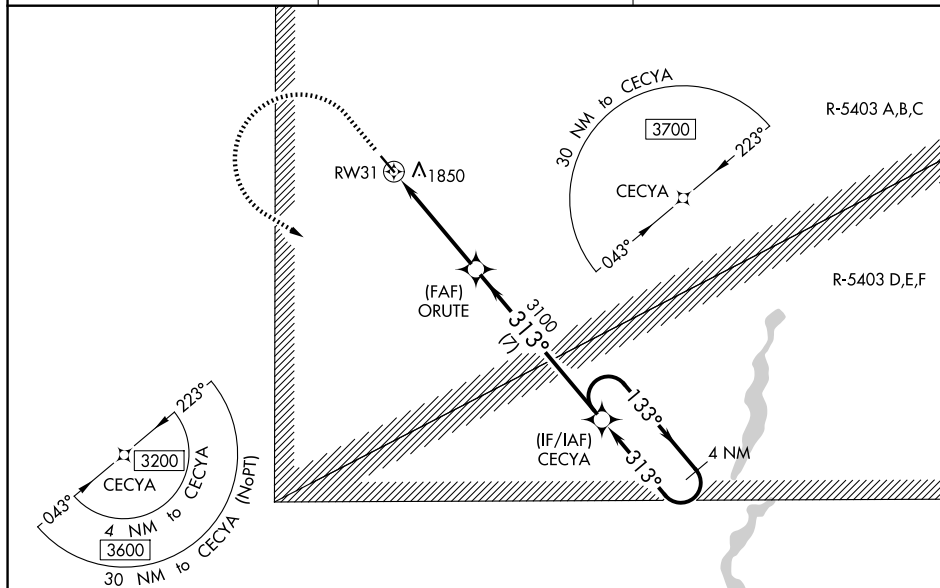

ELEV 1607		TDZE 1606
-----------	--	-----------

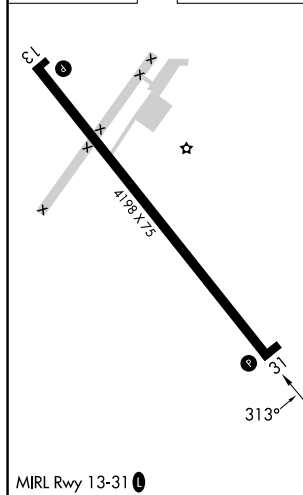

4 NM Holding Pattern

CECYA

ORUTE

RW31

1.7 NM

2.9 NM

7 NM

133°

313°

3100

3100

GP 3.00° TCH 40

* LNAV only

* 1.7 NM to RW31

VGS1 and RNAV glidepath not coincident (VGS1 Angle 3.00/TCH 20).

CATEGORY	A	B	C	D
LPV DA	1856-1	250 (300-1)		NA
LNAV/VNAV DA	2050-1½	444 (500-1½)		NA
LNAV MDA	2160-1	554 (600-1)	2160-1½ 554 (600-1½)	NA
CIRCLING	2200-1	593 (600-1)	2200-1½ 593 (600-1½)	NA